



812-LED-FH INSTALLATION

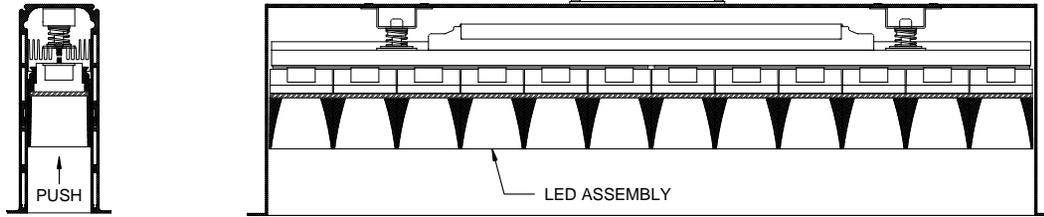

1. Remove lamp assembly from housing by pushing lamp assembly into housing releasing assembly from latch. (FIG A)

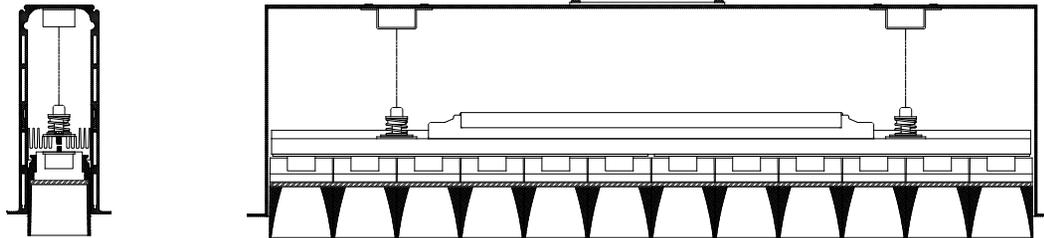

2. With LED assembly removed install housing as shown with screws through housing into blocking installed above. Pull power and dimming leads through wiring access plate with approved conduit connector. (FIG B)

FIG A

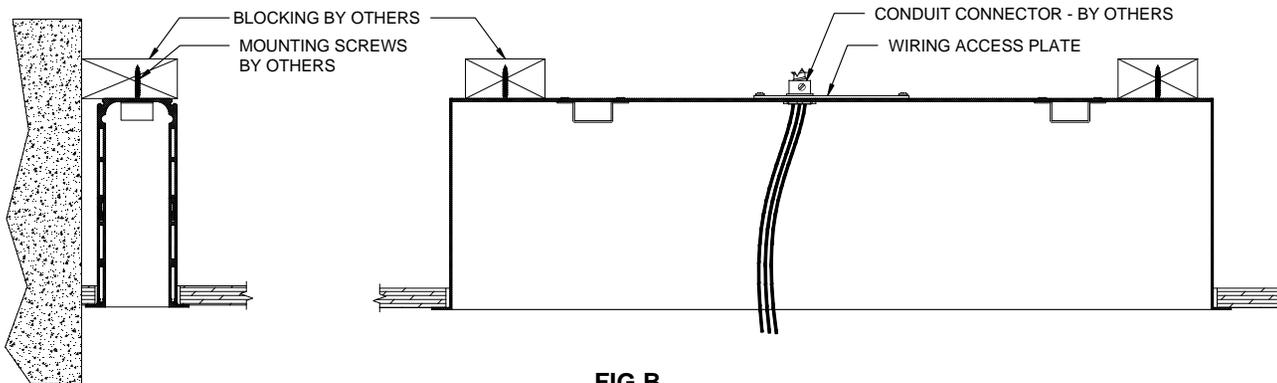


FIG B

***ENSURE HOUSING OPENING IS HELD AT 2" WIDE**



812-LED-FH INSTALLATION

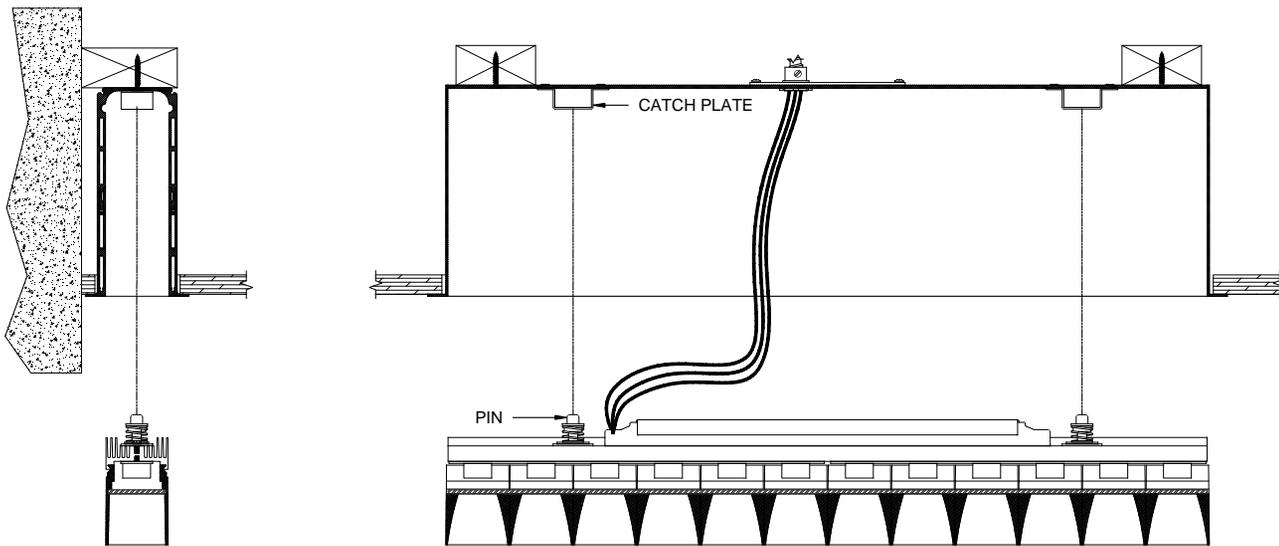


FIG C

4. Connect LED assembly to power. Reinsert LED assembly into housing aligning pins with catch plate and pushing up into fixture housing until a click is felt. (FIG C)

5. Test with power.

****IT IS RECOMMENDED THESE PRODUCTS BE INSTALLED BY A QUALIFIED ELECTRICIAN****

***ENSURE HOUSING OPENING IS HELD AT 2" WIDE**

