REGRESSED CONICAL ADJUSTABLE ACCENT LIGHTS

Quad lamp, solid state light engine, recessed accent lights with (4) 5" (127mm) trim, round aperture and optional glass diffuser. Accent and downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction.

SPECIFICATIONS

HOUSING

· Precision die-formed heavy gauge aluminum with machine adjustable ceiling collar

MOUNTING

· Recessed in architectural ceiling

ELECTRICAL

- · Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers / Available for 120 phase control and Lutron.

LAMP

- (4) Citizen LED supplied with fixture
- · Available in 2700 thru 4000K color temperature and 90+CRI

SOCKET

- · Precision die-formed aluminum yoke with CNC machined lampholder assembly
- Ulsocket[™] allows easy field replacement of light engine

LENS

- Interchangeable reflector provides multiple beam patterns
- · Optional borosilicate lenses available for lampholder and aperture

TRIM


· Flanged, one piece die-cast aluminum 4 flat round plates and round aperture

FINISH

- Black powder paint housing
- · Aperture trim available in white as standard

LABELS

• Stested to UL standards 1598, Damp location, Wet with ST trim

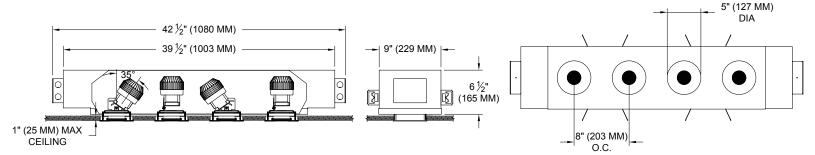

ORDERING INFORMATION

1000-4MDL-LEDZ-UH	TRIM	DRIVER	BEAMSPREAD	TRIM FINISH	APERTURE LENS
	FT			P14	
Quad Lamp (Linear) Universal Housing 9 = 90+CRI 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	FT=Flanged Trim	CZ14=120-277v, 14W 1100Im CZ20=120-277v, 20W 1650Im CZ28=120-277v, 28W 2200Im *Add ELD0 for EldoLED 0-10v Dimming *Add DM2 for 2 wire dimming *Add LT2, LT3, LT5 for Lutron 2 wr, Lutron 3 wr, Lutron 5 wr dimming, LTB for Lutron Fade-to-Black	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees 60 = 60 Degrees	P14 = White	91A = Solite 93A = Frosted



Patent Pending. These specifications subject to change without notice.

www.specialtylightingindustries.com 1306 Doris Avenue, Ocean, NJ 07712 USA 800.462.7812 732.517.0800 FAX:732.517.0971 05/17

1000-4MDL-LEDZ-UH

JOB:	
SPECIFIER:	
TYPE:	
QUANTITY:	
SIGNATURE:	

