REGRESSED CONICAL ADJUSTABLE ACCENT LIGHTS

1001-2MDL-AD-UH

Dual lamp, solid state light engine, recessed accent lights with (2) 5" (127mm) flanged trim, round aperture and optional glass diffuser. Accent and downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction. AmbientDim™ provides Superior CRI at all dimming levels.

SPECIFICATIONS

HOUSING

· Precision die-formed heavy gauge aluminum with machine adjustable ceiling collar

MOUNTING

· Recessed in architectural ceiling

ELECTRICAL

· Integral dimmable electronic driver with internal short circuit protection

LAMP

(2) AmbientDim[™] LED supplied with fixture

SOCKET

· Precision die-formed aluminum yoke with CNC machined lampholder assembly

LENS

- · Interchangeable reflector provides multiple beam patterns
- · Optional borosilicate lenses available for lampholder and aperture

IKIIV

· Flanged, one piece die-cast aluminum 2 conical shields and round aperture

FINISH

- · Black powder paint housing
- · Aperture trim available in white as standard

LABELS

• J. , US tested to UL standards 1598, Damp location, Wet with ST trim





JOB:

TYPE:

SPECIFIER:

QUANTITY:

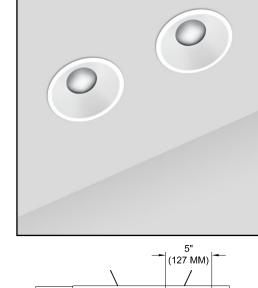

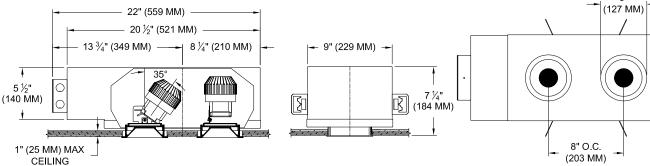

ORDERING INFORMATION

1001-2MDL-AD-UH	TRIM	SOURCE / DRIVER	BEAMSPREAD	TRIM FINISH	APERTURE LENS
		AD14 /		P14	
Ambient Dimming LED	FT=Flanged Trim	AD14 =350ma, 14.5W, 1000lm	15 = 15 Degrees	P14 = White	91A = Solite
CCT Max 3000K-1900K	ST=Shower Trim *Req. Aperture Lens	\$1 =0-10V dimming, 1%, 120-277V T1 =TRIAC/ELV 2-wire, 3% 120V (Lead/Trail Edge) E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277V E2 =EldoLED DALI, 0.1%, 120-277V E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277V L2 =Ltrn Hi-lume 1% 2-wr LED driver (120V fwrd phase) L3 =Lutron Hi-lume 1% 3-wire/EcoSystem, 120-277V LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277V, Soft-on, Fade-to-Black	24 = 24 Degrees 38 = 38 Degrees 60 = 60 Degrees		93A = Frosted

