

Dual lamp, low-voltage halogen, recessed accent lights, with (2) 4" (102mm) diameter conical trim, round aperture and optional glass diffuser. Accent and downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction. Flangeless trim can be used with in solid surface ceilings such as wood, stone, metal panel or glass.

## SPECIFICATIONS

### HOUSING

- Precision die-formed heavy gauge aluminum

### MOUNTING

- Install from below in sheetrock ceiling

### ELECTRICAL

- Integral dimmable electronic or toroidal magnetic transformer
- 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection
- External thermoprotector

### LAMP

- (2) MR-16, 50w max. supplied by others

### SOCKET

- Precision die-formed aluminum yoke with CNC machined lampholder assembly
- G4/G6 ceramic socket with high temperature, teflon coated lead wires

### LENS

- Clear pyrex safety lens.
- Optional borosilicate lenses available for lampholder and aperture

### TRIM



- Flanged, die-cast aluminum 2 conical shields with round aperture

### FINISH

- Black powder paint housing

### LABELS

-  US, US tested to UL standards 1598, Damp location, wet with FST trim,

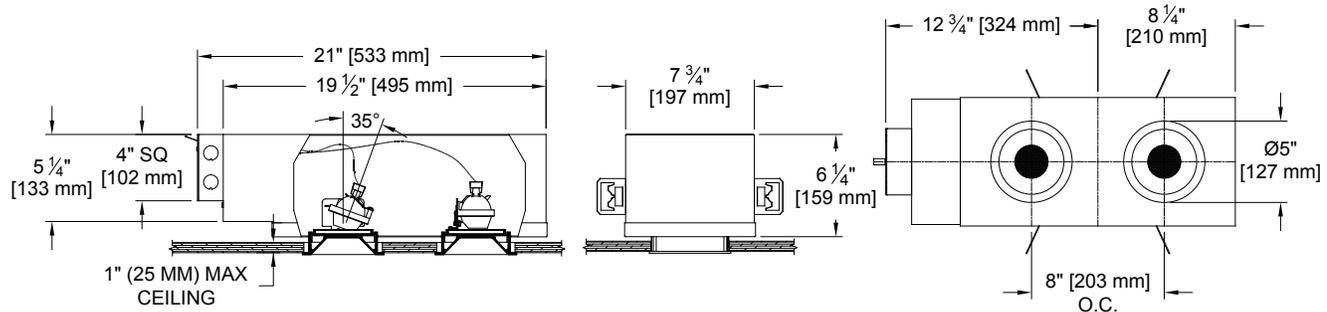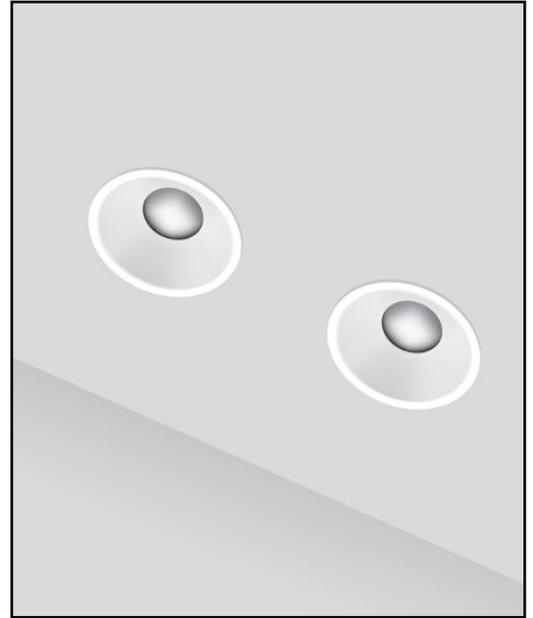

## ORDERING INFORMATION

1001-2MDL-UH_	TRIM	TRANSFORMER	LAMP LENS	FINISH	APERTURE LENS
				<b>P14</b>	
Dual Lamp Universal Housing <b>MR35</b> = MR-16/ 35W <b>MR50</b> = MR-16/ 50W <b>SMRA</b> = SORAA Retrofit	<b>FT</b> =Flanged Trim <b>FST</b> =Flanged Shower Trim	<b>TX</b> =Magnetic / 120v <b>EX</b> =Electronic / 220v <b>EXS</b> =Elect. SORAA* / 240v 277v *Standard 120v	<b>90L</b> = Clear-Standard <b>91L</b> = Solite <b>92L</b> = Supertex <b>93L</b> = Frosted <b>97L</b> = Black Hexcell <b>98L</b> = UV	<b>P14</b> = White	<b>Blank</b> = None <b>91A</b> = Solite



Patent Pending.  
 These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)  
 1306 Doris Avenue, Ocean, NJ 07712 USA  
 800.462.7812 732.517.0800 FAX:732.517.0971