

Multi lamp, solid state light engine, recessed, open slot accent light. Accent and down-lighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction in sheetrock ceiling.

**SPECIFICATIONS**

**HOUSING**

- Extruded aluminum with bolt on end plates and integral plaster flange

**MOUNTING**

- Install from below in sheetrock ceiling

**ELECTRICAL**

- Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers
- Available for 120v phase control (ELV) and Lutron

**LAMP**

- Citizen LEDs supplied with fixture

**SOCKET**

- Precision die-formed aluminum yoke with CNC machined lampholder assembly

**LENS**

- Solite, Veiling Acrylic available as standard. For more options, consult factory

**OPTICS**

- Interchangeable reflector provides multiple beam patterns


**TRIM**

- Flangeless

**FINISH**

- Powder paint on all surfaces in black and white as standard
- Additional colors and RAL palette available
- Consult factory for custom finishes

**LABELS**

-  , US tested to UL standards 1598, Damp location, CP for Chicago Plenum


**JOB:** \_\_\_\_\_

**SPECIFIER:** \_\_\_\_\_

**TYPE:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_

**SIGNATURE:** \_\_\_\_\_

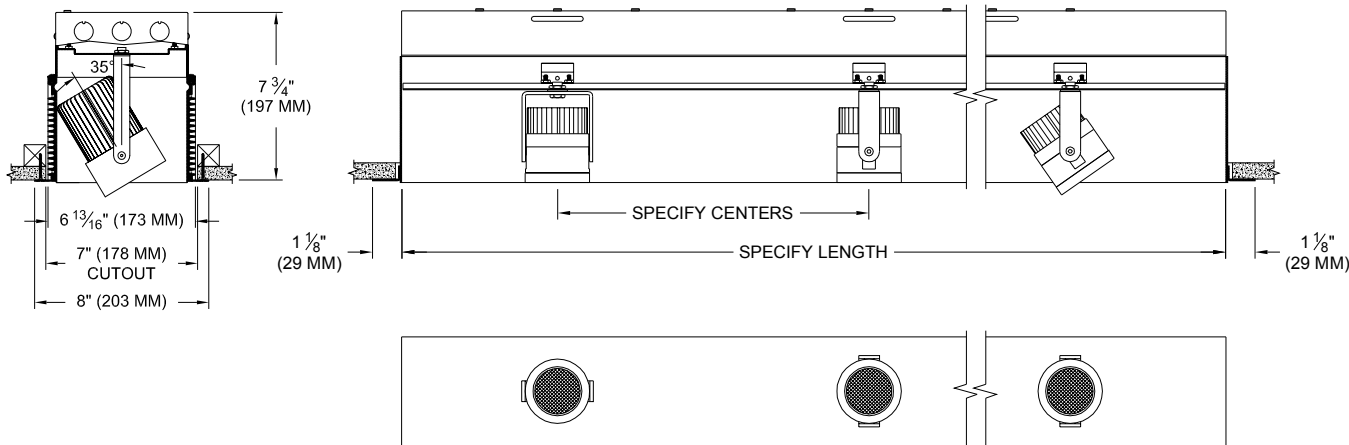

**ORDERING INFORMATION**

REFLECTED PLAN VIEW

1005C-LEDZ-PH	LENGTH	LAMP SPACING	SOURCE / DRIVER	BEAMSPREAD	FINISH	LAMP LENS	ACCESSORIES
			/				
Plaster Housing 9 = 90+CRI 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	Specify length	4 = 4" (102mm) 6 = 6" (152mm) 8 = 8" (203mm) 12 = 12" (305mm) CST= Custom (please advise)	CZ14=120-277v, 14W 1640lm CZ20=120-277v, 20W 2265lm C1 =0-10V dimming, 1%, 120-277v C2 =TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge) E1 =EldoLED 0-10V Logarith.Dim, 0.1%, 120-277v E2 =EldoLED DALI, 0.1%, 120-277v E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Ltm Hi-lume 1% 2-wr LED driver (120v fwd ph) L3 =Ltm Hi-lume 1% 3-wire/EcoSystem, 120-277v LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees 60 = 60 Degrees	P14 = White BLK=Black PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	Blank= None 91A = Solite 79A = Veiling Acrylic	CP = Chicago Plenum