

Multi-lamp, low-voltage halogen, recessed, open slot accent light with nominal 4" wide rectilinear aperture and customizable length. Accent and downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction in sheetrock ceilings

SPECIFICATIONS

HOUSING

- Extruded aluminum with bolt on end plates and integral plaster flange

MOUNTING

- Install from below into sheetrock ceiling

ELECTRICAL

- Integral dimmable electronic or toroidal magnetic transformer
- 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection
- External thermoprotector

LAMP

- MR-16, 50w max. supplied by others

SOCKET

- Precision die-formed aluminum yoke with CNC machined lampholder assembly



LENS


- Clear pyrex safety lens
- Optional borosilicate lenses available for lampholder

FINISH

- Powder paint on all surfaces in black and white as standard
- Additional colors and RAL paalette available
- Consult factory for custom finishes

LABELS

-  US tested to UL standards 1598, Damp location, 

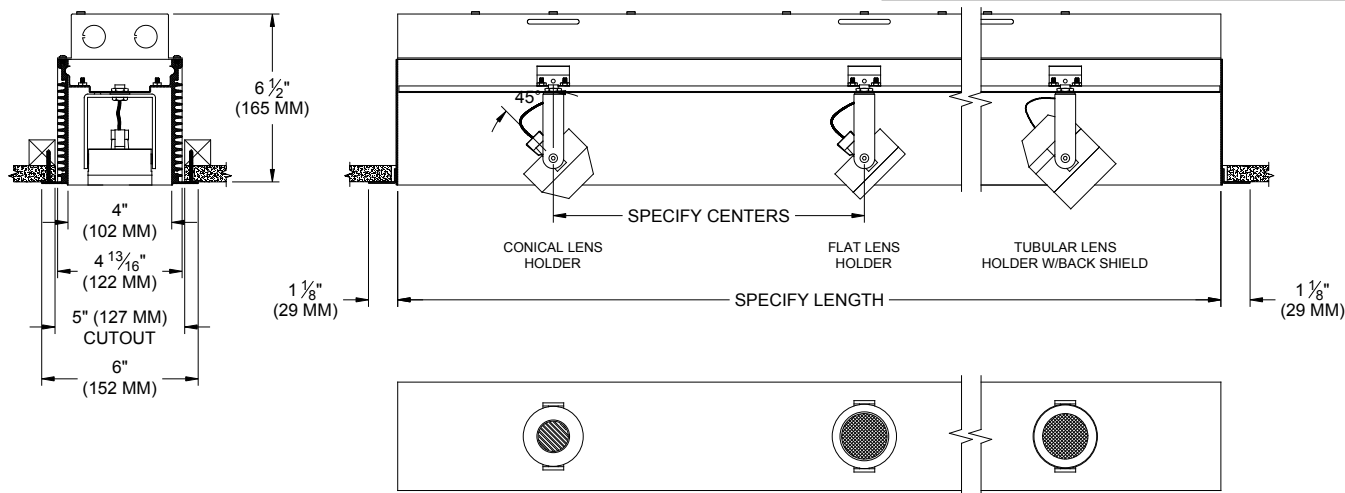

ORDERING INFORMATION

REFLECTED PLAN VIEW

MODEL	LENGTH	LAMP SPACING	TRANSFORMER	LENS HOLDER	LAMP LENS	FINISH	APERTURE LENS
1005C-MR16-PH							
Plaster Housing	Specify length	4 = 4" (102mm) 6 = 6" (152mm) 8 = 8" (203mm) 12 = 12" (305mm) CST= Custom (please advise)	TX=Magnetic / 120v EX=Electronic / 220v** EXS=Elect. SORAA* RX=Remote / 240v 277v **EX image shown above *Standard 120v	CL=Conical FL=Flat IL=Indexed* TL=Tubular *92L Only	90L = Clear 91L = Solite 92L = Supertex 93L = Frosted 95L = Full Prismatic 97L = Black Hexcell 98L = UV	P14 = White BLK=Black PXX = SLI Color XXXX = RAL # CST = Custom	BS= Back Shield PD = Pull Down Yoke



Patent Pending.
These specifications subject to change without notice.

www.specialtylightingindustries.com
1306 Doris Avenue, Ocean, NJ 07712 USA
800.462.7812 732.517.0800 FAX:732.517.0971