# REGRESSED RECTILINEAR APERTURE ACCENT LIGHT

# 1009-2MR16-TUH

Dual lamp, solid state light engine, recessed accent light with nominal 4"x~9" (100mm x~225mm) trim, rectilinear aperture and optional glass diffuser. Accent and downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction.

## **SPECIFICATIONS**

### **HOUSING**

 Precision die-formed heavy gauge aluminum with adjustable mounting bracket and die-cast ceiling collar

#### MOUNTING

· Recessed in architectural ceiling

### **ELECTRICAL**

- · Remote transformer required- sold separately
- · Transformer should be sized for the run length
- · External thermoprotector

#### LAMP

· (2) MR-16, 50w max. supplied by others

#### SOCKET

- · Precision die-formed aluminum yoke with CNC machined lampholder assembly
- · G4/G6 ceramic socket with high temperature, teflon coated lead wires

#### **LENS**

- · Clear pyrex safety lens.
- Optional borosilicate lenses available for lampholder and aperture

### **TRIM**

- Flanged or flangeless, 1 piece die-cast aluminum pyramidal shield
- · ST trim fully sealed and gasketed


#### **FINISH**


- · Black powder paint housing
- · Aperture trim available in black and white as standard
- · Solid wood, additional colors, RAL palette, custom finishes

### **LABELS**

• , US tested to UL standards 1598, Damp location, Wet with ST trim, S\*RAA



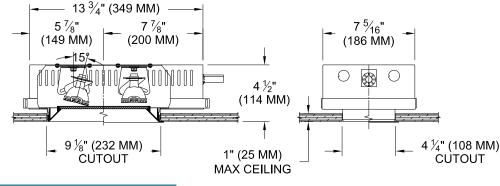



# **ORDERING INFORMATION**

MODEL	TRIM	TRANSFORMER	LAMP LENS	TRIM FINISH	APERTURE LENS
1009-2MR16-TUH					
Thin Universal Housing	FT=Flange Trim PT=Panel Trim** ST=Shower Trim* ZT=Zero Trim **WXX only *Aperture lens required	<b>RX=</b> Remote / 120v / 277v	90L = Clear 91L = Solite 92L = Supertex 93L = Frosted 97L = Black Hexcell 98L=UV	P14 = White BLK=Black PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	Blank= None 91A = Solite 92A = Supertex 93A = Frosted 95A = Full Prismatic



JOB:
SPECIFIER:
TYPE:
QUANTITY:
SIGNATURE:

