Triple lamp, low-voltage halogen, recessed accent light with nominal 4"x 13.5" (100mm x 343mm) rectangular aperture and flangeless trim.

TYPE:		
JOB:		
SPECIFIER:		

## **SPECIFICATIONS**

**HOUSING -** Precision die-formed heavy gauge aluminum with flangeless trim and integrated screed edge.

**MOUNTING -** Install from below into sheetrock ceiling. **ELECTRICAL -** Integral dimmable electronic or torroidal magnetic transformer. 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection. External thermoprotector.

LAMP - (3) MR-16, 50w max. supplied by others.

LABELS - UL, C-UL, Damp location

**SOCKET -** Precision die-formed aluminum yoke with CNC machined lampholder assembly. G4/G6 ceramic socket with high temperature, teflon coated lead wires.


**LENS -** Clear pyrex safety lens. Optional borosilicate lenses available for lampholder and aperture.

**TRIM -** Flangeless, one piece die-cast aluminum pyramidal shield.

**FINISH** - Black powder paint housing. Aperture trim available in black and white as standard. Solid wood, additional colors and RAL palette available. Consult factory for custom finishes.

## **APPLICATIONS**

Accent and downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction in sheetrock ceilings.

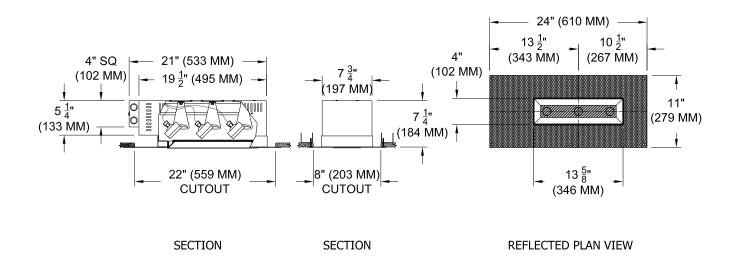

## ORDERING INFORMATION

HOUSING	TRIM	TRANSFORMER		LENS HOLDER	LAMP LENS	TRIM FINISH	APERTURE LENS
1009-3MR16-PH	ZT	1					
Plaster Flange Housing	ZT = Zero Trim	TX = Magnetic EX = Electronic EX2 = 2 cir. Elec. RX = Remote	277	CL= Conical FL = Flat IL = Indexed	90L = Clear 91L = Solite 92L = Supertex 95L = Full Prismatic 96L = Black Hexcell	P14 = White PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	Blank = None 91A = Solite 92A = Supertex 93A = Sandblasted 95A = Full Prismatic

