

Dual lamp, solid state light engine, recessed accent light with nominal 4"x9" rectilinear aperture, beveled trim and 3"x8" glass diffuser. Accent and downlighting in medium to high ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction. AmbientDim™ provides Superior CRI at all dimming levels.

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum
- ≈ Airtight construction suitable for direct contact with insulation

MOUNTING

- Recessed in architectural ceiling

ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection

LAMP

- AmbientDim™ LED supplied with fixture

SOCKET

- Precision aluminum yoke with CNC machined lampholder assembly

LENS

- Interchangeable reflector provides multiple beam patterns
- Optional borosilicate lenses available for aperture

TRIM

- Flanged or flangeless, one piece die-cast aluminum pyramidal shield
- ST is flanged trim fully sealed and gasketed. Aperture lens required

FINISH

- Black powder paint housing / Aperture trim available in black and white as standard
- Solid wood, additional colors, RAL palette, custom finishes

LABELS

-  US, US tested to UL standards 1598, Damp location, Wet with ST trim, IC/Airtight, Chicago Plenum

JOB: \_\_\_\_\_



SPECIFIER: \_\_\_\_\_

TYPE: \_\_\_\_\_


QUANTITY: \_\_\_\_\_

SIGNATURE: \_\_\_\_\_


AmbientDim™

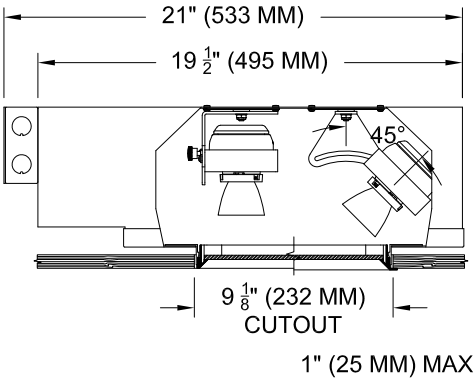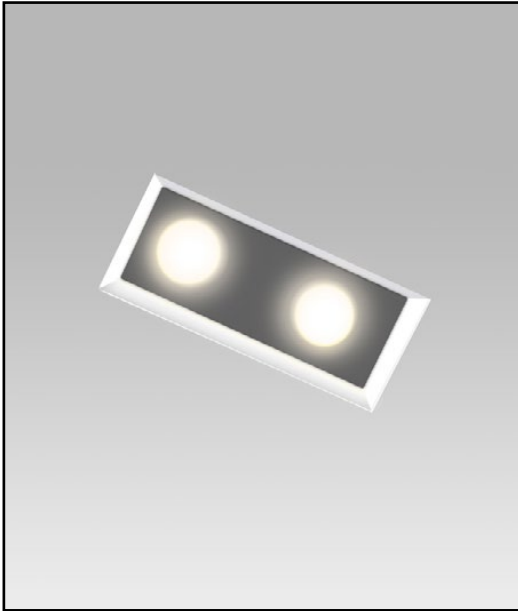

SECTION

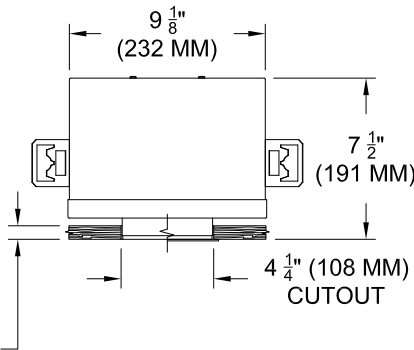

SECTION

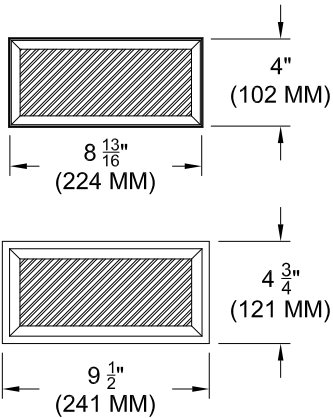

REFLECTED PLAN VIEW

Hanger bars sold separately

ORDERING INFORMATION

| 1014-2LED-AD-AUH                                                                 | TRIM                                                                                                               | SOURCE / DRIVER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | BEAMSPREAD                                                               | TRIM FINISH                                                                               | APERTURE LENS                                                                 | ACCESSORIES       |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------|
|                                                                                  |                                                                                                                    | /                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                          |                                                                                           |                                                                               |                   |
| Airtight Universal Housing<br>Ambient Dimming LED<br><br>*CCT<br>Max 3000K-1900K | FT=Flanged Trim<br>PT=Panel Trim**<br>ST=Shower Trim*<br>ZT=Zero Trim<br><br>**WXX Only<br>*Aperture lens required | AD14= 350ma, 14.5W, 1000lm<br><br>C1 =0-10V dimming, 1%, 120-277v<br>C2 =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge)<br>E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v<br>E2 =EldoLED DALI, 0.1%, 120-277v<br>E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v<br>L2 =Lutron Hi-lume 1% 2-wr LED driver (120v forward phase)<br>LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black<br>LTP =Lutron Hi-lume Premier 0.1%, Fade-to-Black digital Ecosystem, 120-277v (PEQ0) | 15 = 15 Degrees<br>24 = 24 Degrees<br>38 = 38 Degrees<br>60 = 60 Degrees | P14 = White<br>BLK=Black<br>PXX = SLI Color<br>WXX = Wood<br>XXXX = RAL #<br>CST = Custom | Blank= None<br>90A = Clear<br>91A = Solite<br>92A = Supertex<br>93A = Frosted | CP=Chicago Plenum |