

Twin lamp, low-voltage halogen recessed accent light with nominal 4" x 8" rectangular 2 cell aperture and flangeless trim. Accent and downlighting in low to medium ceiling heights typically found in commercial and retail applications. Suitable for new or existing construction in sheetrock ceiling.

## SPECIFICATIONS

### HOUSING

- Precision die-formed heavy gauge aluminum

### MOUNTING

- Install from below in sheetrock ceiling

### ELECTRICAL

- Integral dimmable toroidal magnetic transformer
- 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection / External thermoprotector

### LAMP

- (2) MR-16, 50w max. supplied by others

### SOCKET

- Precision die-formed aluminum yoke with CNC machined lampholder assembly
- G4/G6 ceramic socket with high temperature, teflon coated lead wires

### LENS

- Clear pyrex safety lens
- Optional borosilicate lenses available for lampholder and aperture

### TRIM



- Flangeless, two piece die-cast aluminum pyramidal shield

### FINISH

- Black powder paint housing
- Aperture trim available in black and white as standard
- Solid wood, additional colors, RAL palette, custom finishes available

### LABELS

-  , US tested to UL standards 1598, Damp location,

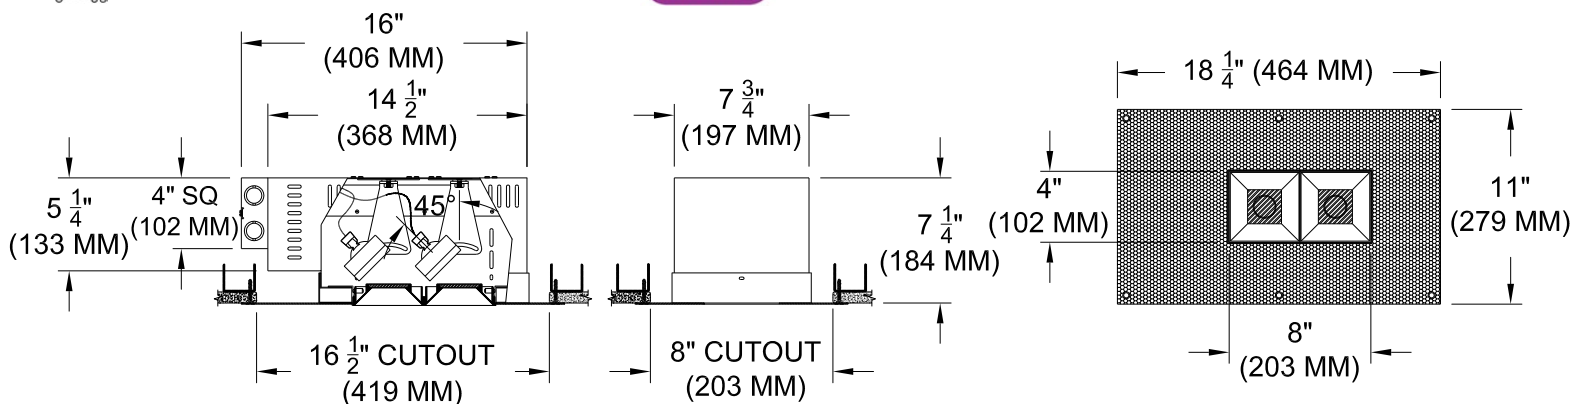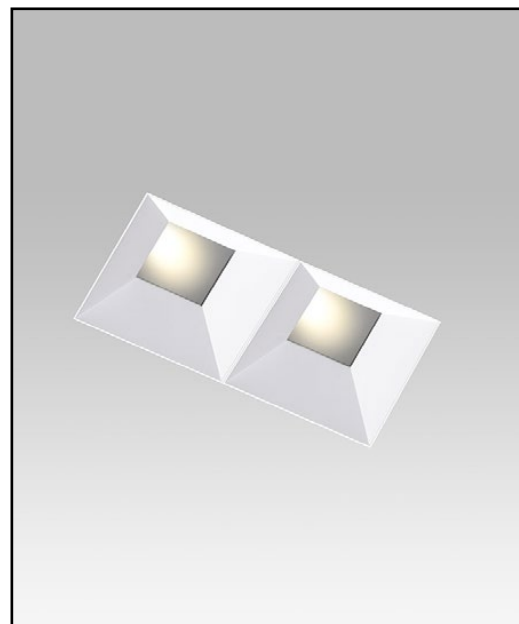

## ORDERING INFORMATION

| MODEL           | TRIM         | TRANSFORMER  | LENS HOLDER                                       | LAMP LENS  | TRIM FINISH   | APERTURE LENS  |
|-----------------|--------------|--|---|--|---|--|
| 1005-2MR16-PH   | ZT           | /  |   |  |   |  |
| Plaster Housing | ZT=Zero Trim | TX=Magnetic / 120v*<br>EX=Electronic / 220v<br>EXS=Elect SORAA / 240v<br>2EX=Elect 2 Circuit / 277v<br>2EXS=Elect 2 Circuit SORAA<br>RX=Remote<br>*Standard 120v | CL=Conical<br>FL=Flat<br>IL=Indexed*<br>*92L Only | 90L = Clear-Standard<br>91L = Solite<br>92L = Supertex<br>93L = Frosted<br>97L = Black Hexcell<br>98L = UV | P14 = White<br>BLK=Black<br>PXX = SLI Color<br>WXX = Wood<br>XXXX = RAL #<br>CST = Custom | Blank= None<br>91A = Solite<br>92A = Supertex<br>93A = Frosted<br>95A = Full Prismatic |



Patent Pending.  
These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)  
1306 Doris Avenue, Ocean, NJ 07712 USA  
800.462.7812 732.517.0800 FAX:732.517.0971