Twin lamp, metal halide, recessed accent light with nominal 4"x8" rectangular 2 cell aperture and flangeless trim. Suitable for install from below applications.

1050-2MR16MH-PH

TYPE:

JOB:

SPECIFIER:

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with perforated flangeless trim and integrated screed edge.

MOUNTING - Install from below in sheetrock ceiling. **ELECTRICAL** - Integral electronic ballast. 120v primary lead, (220v, 240v, 277v available). External thermoprotector.

LAMP - (2) GE MR-16 CMH 39w max. supplied by others.

LABELS - CSA-C,US, Damp location

SOCKET - Precision die-formed aluminum yoke with CNC machined lampholder assembly. GX10 and ceramic sockets with high temperature silicone coated lead wires.


LENS - Optional borosilicate lenses available for lampholder and aperture.

TRIM - Flangeless, two piece die-cast aluminum pyramidal shield.

FINISH - Black powder paint housing. Aperture trim available in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

Accent and downlighting in low to medium ceiling heights typically found in commercial and retail applications. Suitable for new or existing construction.

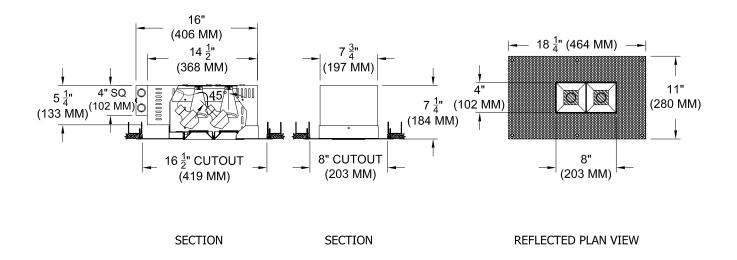

ORDERING INFORMATION

HOUSING	TRIM	BALLAST		LENS HOLDER	LAMP LENS	TRIM FINISH	APERTURE LENS
1050-2MR16MH-PH	ZT	WATTS/VOLTS					
Plaster Flange Housing	ZT = Zero Trim	20/220 39 20/240 39	9/120 9/220 9/240 9/277	CL= Conical FL = Flat IL = Indexed	90L = Clear 91L = Solite 92L = Supertex 95L = Full Prismatic	P14 = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	Blank = None 91A = Solite 92A = Supertex 93A = Sandblasted 95A = Full Prismatic



NOTE: These specifications subject to change without notice. www.specialtylightingindustries.com 1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 09/09