

Single lamp, halogen recessed wall washer with nominal 5"x 6" aperture.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum. Precision die-formed plaster frame with perforated flangeless trim and integrated screed edge. Suitable for install from below applications.

MOUNTING - Recessed in sheetrock ceiling.

ELECTRICAL - Integral junction box with external thermoprotector.

LAMP - T4/FR/DC 60w max. T10/FR or BT10/W 100w max. supplied by others.

LABELS - UL, C-UL, Damp location

SOCKET - Nickel plated steel double contact bayonet base with stainless steel spring for optimum contact or medium base porcelain socket. High temperature, teflon coated lead wires.


LENS - Cast borosilicate fresnel lens.

TRIM - Flangeless, integral to housing.

FINISH - Powder paint on all surfaces in black and white as standard. 14 additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

Wallwashing in low ceiling heights typically found in residential, and commercial applications. Suitable for new or existing construction.

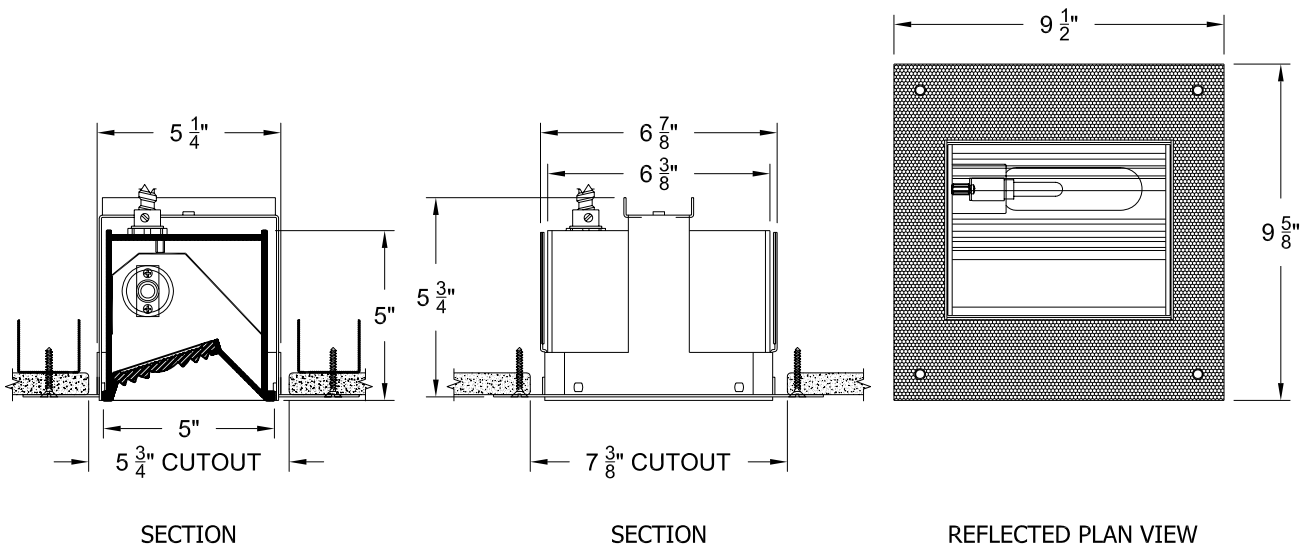

ORDERING INFORMATION

HOUSING	LAMP	TRIM FINISH	FRAME-IN KIT
1100			PH
Plaster Housing	T4 = T4 T10 = T10, BT10	WHT = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	PH = Plaster Flange



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 10/07