

Dual lamp, solid state light engine, recessed wall washer with nominal 4.8"x 7.5" (122mm x 191mm) rectilinear flangeless trim. Wallwashing in medium to tall ceiling heights typically found in commercial and retail applications. Suitable for new or existing construction in sheetrock ceilings.

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum
- ∞ Airtight construction suitable for direct contact with insulation

MOUNTING

- Install from below in sheetrock ceiling

ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection

LAMP

- (2) Citizen LEDs or AmbientDim™ LEDs supplied with fixture

LENS

- Frosted Supertex borosilicate spread lens


TRIM

- Flangeless


FINISH

- Housing available in white as standard
- Additional colors, RAL palette, custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location, IC/Airtight

JOB: _____
 SPECIFIER: _____
 TYPE: _____
 QUANTITY: _____
 SIGNATURE: _____

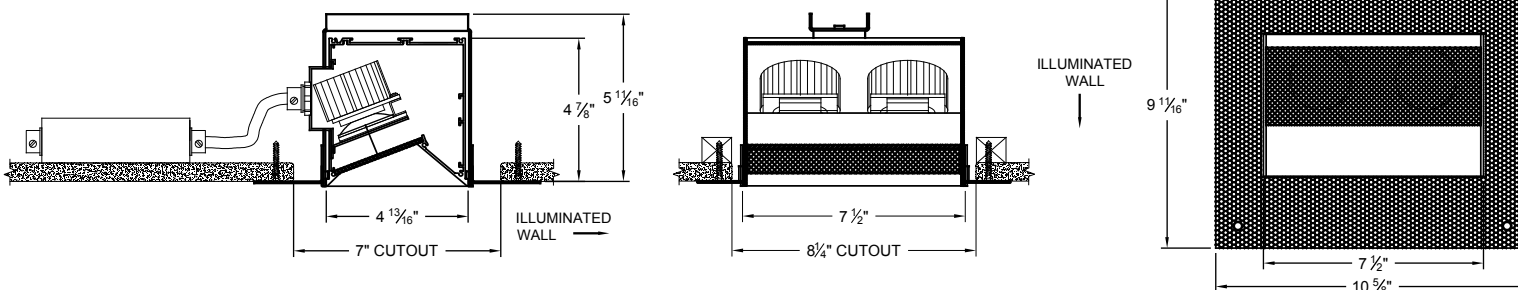

ORDERING INFORMATION

1200R-LED-APH	SOURCE / DRIVER	TRIM FINISH	APERTURE LENS
	/		82A
Airtight Plaster Housing 9 = 90+CRI 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K AD = Ambient Dim Max 3000K-1900K	CZ14 =350ma, 14W 1100lm AD14 =350ma, 14.5W,1000lm C1 =0-10V dimming, 1%, 120-277v C2 =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2 =EldoLED DALI, 0.1%, 120-277v E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Lutron Hi-lume 1% 2-wire LED driver (120v forward phase) LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	P14 = White BLK =Black PXX = SLI Color XXXX = RAL # CST = Custom	82A = Frosted Supertex



Patent Pending.
 These specifications subject to change without notice.

www.specialtylightingindustries.com
 1306 Doris Avenue, Ocean, NJ 07712 USA
 800.462.7812 732.517.0800 FAX:732.517.0971