

Twin lamp, low-voltage halogen recessed adjustable wall washer with nominal 5"x 7" aperture and flangeless trim.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum. Precision die-formed plaster frame with perforated flangeless trim and integrated screed edge. Suitable for install from below applications.

MOUNTING - Recessed in sheetrock ceiling.

ELECTRICAL - Integral electronic ballast and dimmable electronic transformer. 120v primary lead, (220v, 240v, 277v available). External thermoprotector.

LAMP - (2) MR-16 or (2) ALR12, 37w max. supplied by others.

LABELS - UL, C-UL, Damp location

SOCKET - Precision die-formed aluminum socket plate.

G4/G6 ceramic socket or nickel plated steel double contact bayonet base with stainless steel spring for optimum contact. High temperature lead wires.


LENS - Supertex borosilicate spread lens. Others available consult factory.

TRIM - Flangeless, integral to housing.

FINISH - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

Wallwashing in low to medium ceiling heights typically found in residential, and commercial applications. Suitable for new or existing construction.

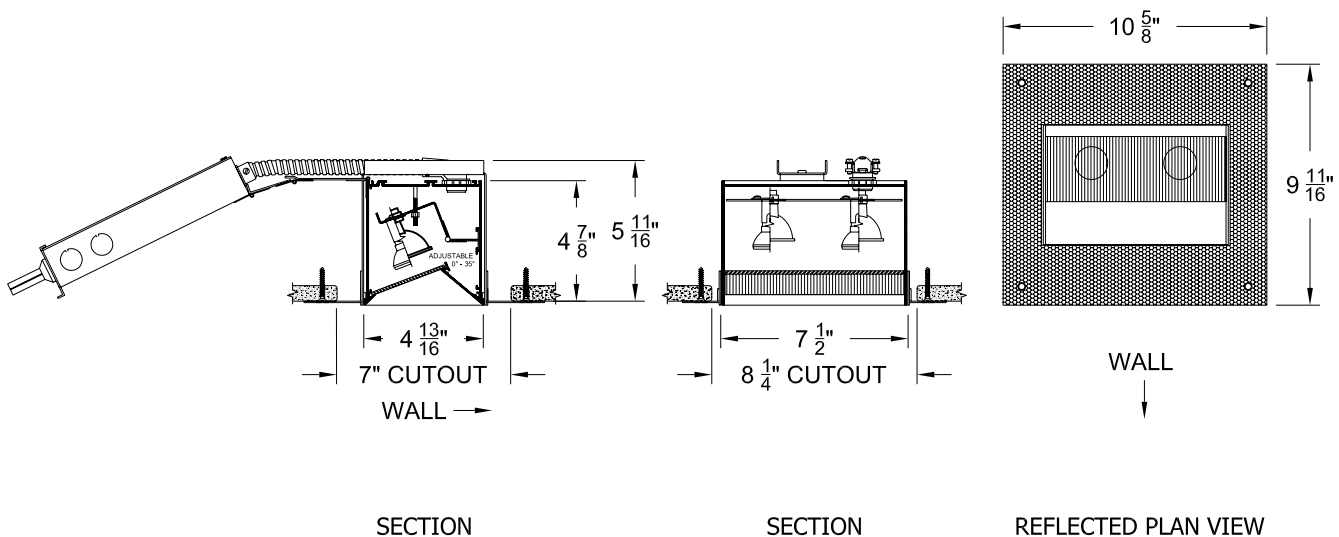

ORDERING INFORMATION

HOUSING	TRANSFORMER		TRIM FINISH	APERTURE LENS
1200R - _____ - PH				
Flangeless plaster trim. MR11 = MR11 lamp MR16 = MR16 lamp ALR12 = ALR12 lamp	EX = Electronic RX = Remote	120 220 240 277	WHT = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	82A = Frosted Supertex 91A = Solite 92A = Supertex 93A = Sandblasted 95A = Full Prismatic



**SPECIALTY LIGHTING
INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 02/12