

Twin lamp, low-voltage halogen recessed wall washer with nominal 4"x 9" (100mm x 225mm) rectilinear aperture.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with flangeless trim and integrated screed edge. Airtight construction suitable for direct contact with insulation.

MOUNTING - Install from below in ins. sheetrock ceiling.

ELECTRICAL - Integral dimmable toroidal magnetic transformer. 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection. Remote transformer available.

LAMP - (2) MR-16, NFL 50w max. supplied by others.

LABELS - CSA-C,US, Damp location, ASTM E283 Airtight, Suitable for direct contact with thermal insulation.

SOCKET - Precision die-formed aluminum socket plate. Nickel plated steel double contact bayonet base with stainless steel spring for optimum contact. High temperature silicone lead wires.


LENS - Supertex borosilicate spread lens, hinged for relamping. Optional filters available for lampholder.

TRIM - Flangeless, one piece die-cast aluminum pyramidal shield.

FINISH - Black powder paint housing. Aperture trim available in black and white as standard. Solid wood, additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

Wallwashing in medium to tall ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction.

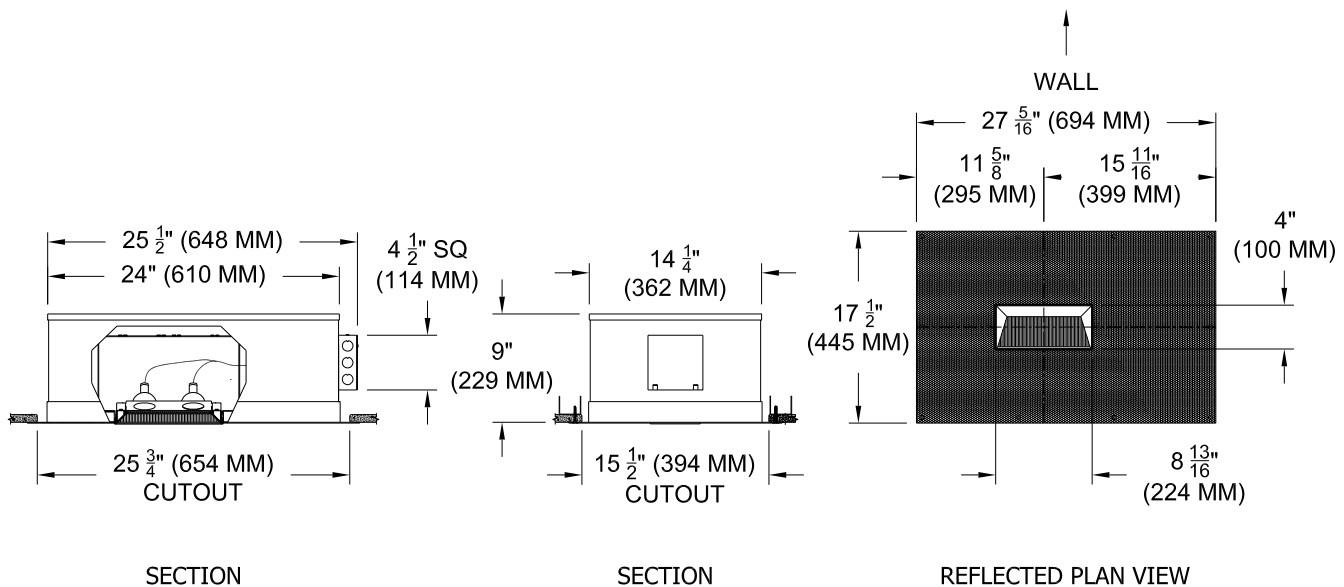

ORDERING INFORMATION

HOUSING	TRIM	TRANSFORMER		LAMP LENS	TRIM FINISH	APERTURE LENS
1240-2MR16-APH	ZT	/				82A
Airtight Plaster Flange Housing	ZT = Zero Trim	RX = Remote TX = Magnetic	120 220 240 277	98L = UV Filter	P14 = White PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	82A = Frosted Supertex



**SPECIALTY LIGHTING
INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 04/13