

Twin lamp, low-voltage halogen recessed wall washer with nominal 4"x 9" rectilinear aperture and flangeless trim. Suitable for install from below applications.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with perforated flangeless trim and integrated screed edge.

MOUNTING - Install from below into sheetrock ceiling.

ELECTRICAL - Integral dimmable electronic transformer. 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection. External thermoprotector. Remote magnetic transformer available.

LAMP - (2) MR-16 NFL, 50w max. supplied by others.

LABELS - CSA-C,US, Damp location.

SOCKET - Precision die formed aluminum socket plate. G4/G6 ceramic socket with high temperature, teflon coated lead wires.


LENS - Supertex borosilicate spread lens, hinged for relamping.

TRIM - Flangeless, one piece die-cast aluminum pyramidal shield.

FINISH - Black powder paint housing. Aperture trim available in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

Wallwashing in medium to tall ceiling heights typically found in commercial and retail applications. Suitable for new or existing construction with limited recessing depth.

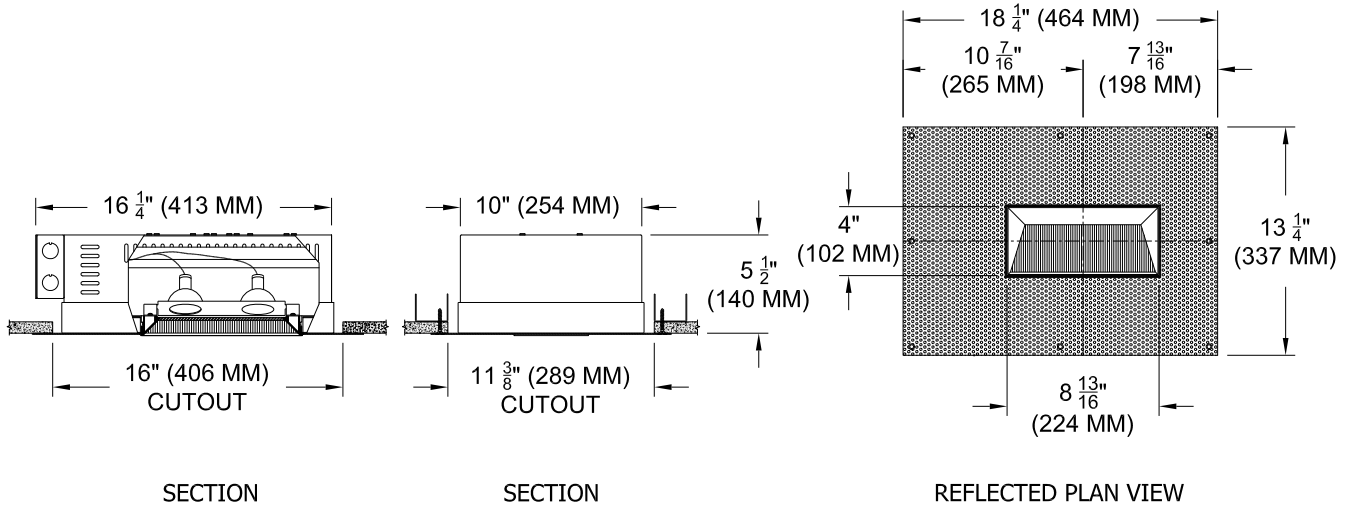

ORDERING INFORMATION

| HOUSING | TRIM | TRANSFORMER | FINISH | APERTURE LENS |
|----------------|----------------------|---|---|----------------|
| 1240-2MR16-SPH | ZT | / | | 82A |
| Shallow | ZT = Flangeless trim | EX = Electronic 120 EX2 = 2 Cir Elec 220 RX = Remote 240 TX = Magnetic 277 | P14 = Matte White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom | 82A = Supertex |



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 01/14