

Single lamp, metal-halide, recessed wall washer with nominal 4" square aperture. Wallwashing in medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction in sheetrock ceilings.

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum with perforated flangeless trim and integrated screed edge

MOUNTING

- Install from below in sheetrock ceiling

ELECTRICAL

- Integral dimmable electronic or toroidal magnetic transformer
- 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection
- External thermoprotector

LAMP

- GE MR-16, 20w CMH supplied by others

SOCKET

- Precision die-formed aluminum socket plate
- GX10 ceramic socket with high temperature, silicone coated lead wires

LENS

- Supertex borosilicate spread lens, hinged for relamping
- Optional filters available for lampholder


TRIM


- Flanged or flangeless, one piece die-cast aluminum pyramidal shield
- ST trim fully sealed and gasketed

FINISH

- Black powder paint housing
- Aperture trim available in black and white as standard
- Solid wood, additional colors, RAL palette, custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location, Wet with ST trim, IC/Airtight,

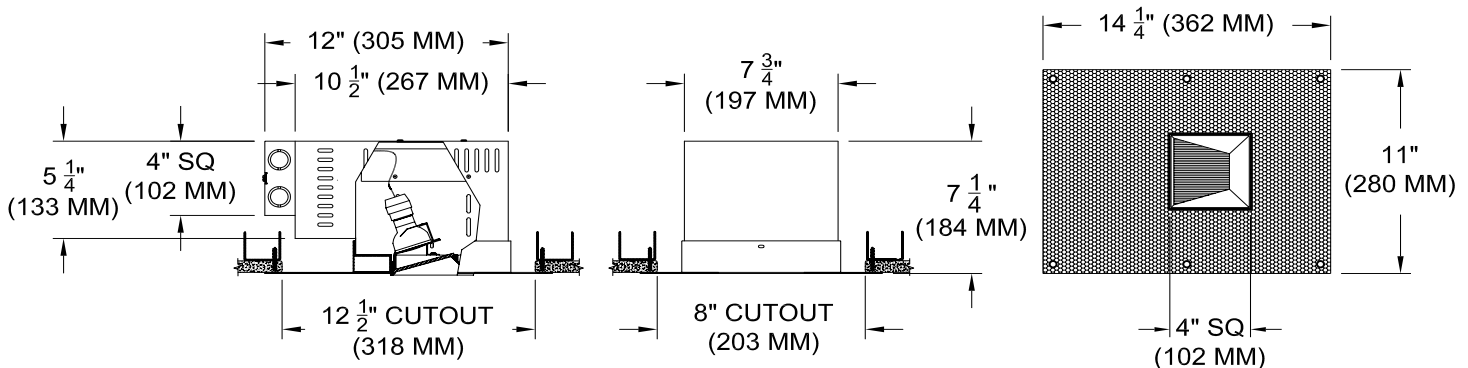

ORDERING INFORMATION

MODEL	TRIM	BALLAST	LAMP LENS	TRIM FINISH	APERTURE LENS
1240-MR16MH-PH					
Metal Halide Plaster Housing	FT=Flanged Trim ST=Shower Trim* ZT=Zero Trim *Aperture lens required	20W / 120v 39W 220v 240v 277v UNV	98L = UV	P14 = White BLK=Black PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	82A = Frosted Supertex



Patent Pending.
These specifications subject to change without notice.

www.specialtylightingindustries.com
1306 Doris Avenue, Ocean, NJ 07712 USA
800.462.7812 732.517.0800 FAX:732.517.0971