

Dual lamp, solid state light engine, recessed combination wallwasher and downlight and optional glass diffuser. Wallwash and downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction.

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum
- ≈ Airtight construction suitable for direct contact with insulation

MOUNTING

- Recessed in architectural ceiling

ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection

LAMP

- (2) AmbientDim™ LED supplied with fixture

SOCKET

- Precision die-formed aluminum yoke with CNC machined lampholder assembly

LENS

- Wall Wash- Frosted Supertex borosilicate spread lens, hinged for relamping


TRIM

- Flangeless, one piece die-cast aluminum 2 square pyramidal shields

FINISH

- Black powder paint housing
- Aperture trim available in white as standard

LABELS

-  , US tested to UL standards 1598, Damp location, IC/Airtight



JOB: _____

SPECIFIER: _____


TYPE: _____

QUANTITY: _____


SIGNATURE: _____

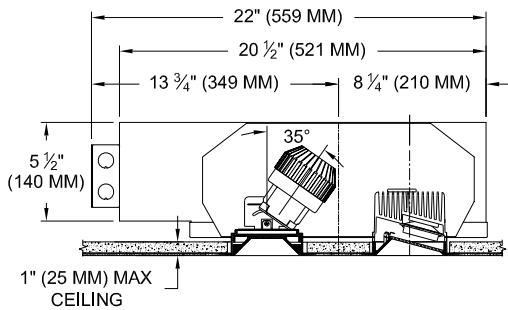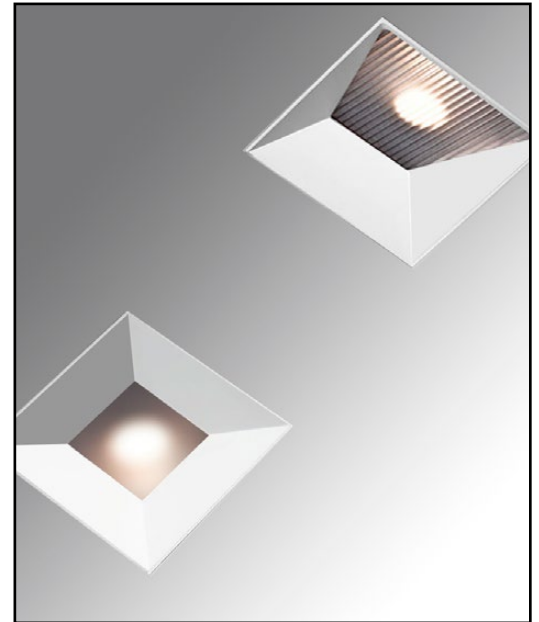


SECTION

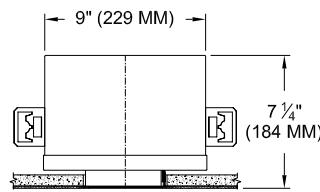

SECTION

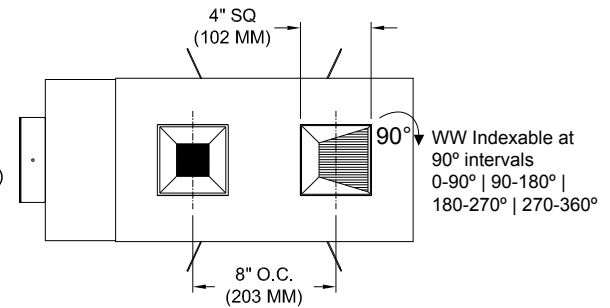

REFLECTED PLAN VIEW (ZT/ZST)

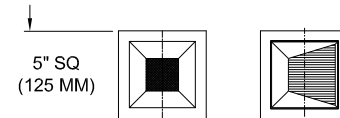

REFLECTED PLAN VIEW (FT/FST)

WW Indexable at 90° intervals
0-90° | 90-180° | 180-270° | 270-360°

ORDERING INFORMATION

1240AW-2MDL-LED-AD-AUH	TRIM	SOURCE / DRIVER	BEAMSPREAD*	TRIM FINISH	DOWN / WW APERTURE LENS
		/			/ 82A
Dual Lamp Airtight Universal Housing *CCT Max 3000K-1900K	ZT=Zero Trim FT= Flanged Trim ZST*=Zero Shower Trim FST=Flanged Shower Trim *Not available for Wall Wash	AD14=350ma, 14.5W, 1000lm C1 =0-10V dimming, 1%, 120-277v C2 =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2 =EldoLED DALI, 0.1%, 120-277v E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Lutron Hi-lume 1% 2-wr LED driver (120v forward phase) LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black LTP =Lutron Hi-lume Premier 0.1%, Fade-to-Black digital Ecosystem, 120-277v (PEQ0)	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees 60 = 60 Degrees *Beamspread applicable only on Accent light.	P14 = White BLK=Black PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	82A= Frosted Supertex 91A= Solite 92A= Supertex 93A= Frosted 95A= Full Prismatic



www.specialtylightingindustries.com
1306 Doris Avenue, Ocean, NJ 07712 USA
800.462.7812 732.517.0800 FAX:732.517.0971

Patent Pending. These specifications subject to change without notice.