

Dual lamp, solid state light engine, recessed combination wallwasher and downlight and optional glass diffuser. Wallwash and downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction in sheetrock ceiling.

**SPECIFICATIONS**

**HOUSING**

- Precision die-formed heavy gauge aluminum

**MOUNTING**

- Recessed in architectural ceiling

**ELECTRICAL**

- Integral dimmable electronic driver with internal short circuit protection

**LAMP**

- (2) Citizen LED supplied with fixture
- Available in 2700 thru 4000K color temperature and 90+ CRI (Downlight only)

**SOCKET**

- Precision die-formed aluminum yoke with CNC machined lampholder assembly

**LENS**

- Wall Wash- Frosted Supertex borosilicate spread lens, hinged for relamping


**TRIM**

- Flangeless, one piece die-cast aluminum 2 square pyramidal shields

**FINISH**

- Black powder paint housing
- Aperture trim available in white as standard

**LABELS**

-  , US tested to UL standards 1598, Damp location



**JOB:** \_\_\_\_\_

**SPECIFIER:** \_\_\_\_\_


**TYPE:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_


**SIGNATURE:** \_\_\_\_\_

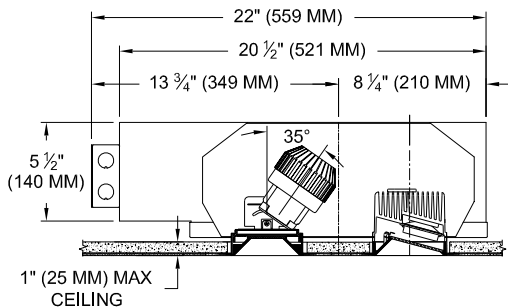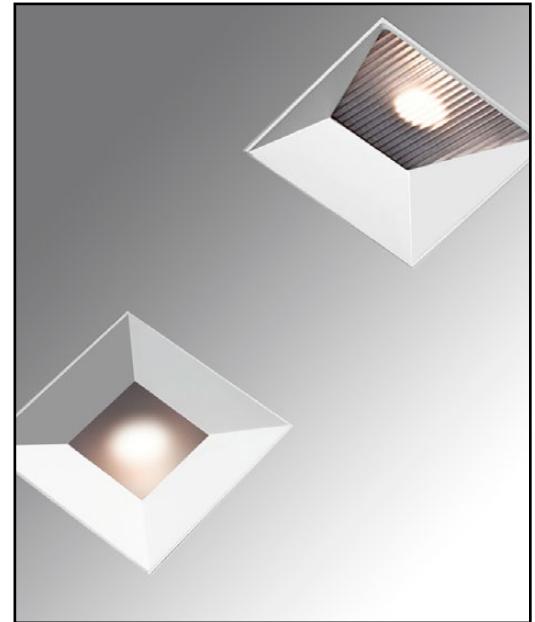


SECTION

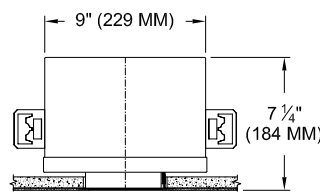

SECTION

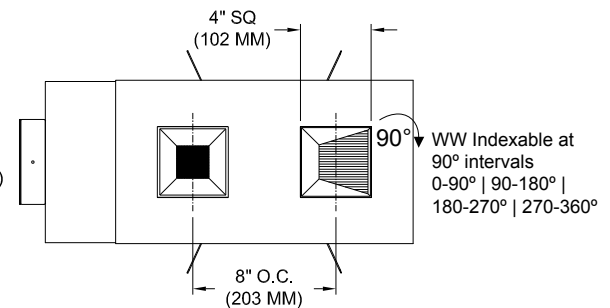

REFLECTED PLAN VIEW (ZT/ZST)



REFLECTED PLAN VIEW (FT/FST)

**ORDERING INFORMATION**

1240AW-2MDL-LEDZ-UH	CRI / COLOR TEMP	TRIM	SOURCE / DRIVER	BEAMSPREAD*	TRIM FINISH	DOWN / WW APERTURE LENS
			/			/ 82A
Dual Lamp Universal Housing	9 = 90+CRI 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	ZT=Zero Trim FT= Flanged Trim ZST*=Zero Shower Trim FST=Flanged Shower Trim  *Not available for Wall Wash	CZ14=120-277v, 14W 1650lm CZ20=120-277v, 20W 2265lm  C1 =0-10V dimming, 1%, 120-277v C2 =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2 =EldoLED DALI, 0.1%, 120-277v E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Lutron Hi-lume 1% 2-wr LED driver (120v forward phase) LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black LTP =Lutron Hi-lume Premier 0.1%, Fade-to-Black digital Ecosystem, 120-277v (PEQ0)	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees 60 = 60 Degrees  *Beamspread applicable only on Accent light.	P14 = White BLK=Black PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	82A= Frosted Supertex 91A= Solite 92A= Supertex 93A= Frosted 95A= Full Prismatic

