Twin lamp, low-voltage halogen recessed combination wall washer and accent light with nominal 4"x 8" rectangular 2 cell aperture and flangeless trim. Suitable for install from below applications.

TYPE:		
JOB:		
SPECIFIER:		

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with flangeless trim and integrated screed edge. Airtight construction suitable for direct contact with insulation.

MOUNTING - Install from below into sheetrock ceiling.

ELECTRICAL - Integral dimmable electronic or torroidal magnetic transformer. 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection.

LAMP - (2) MR-16, 50w max. supplied by others.

LABELS - CSA-C,US, Damp location. Type IC/Airtight

SOCKET - Precision die formed aluminum socket plate and one adjustable aluminum yoke and CNC machined lampholder assembly. G4/G6 ceramic socket with high temperature, teflon coated lead wires.


LENS - Supertex borosilicate spread lens, hinged for relamping. Optional lens on accent light cell.

TRIM - Flangeless, two piece die-cast aluminum pyramidal shield.

FINISH - White powder paint housing. Aperture trim available in black white or RAL colors as standard. Consult factory for custom finishes.

APPLICATIONS

Wallwashing and accent lighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction with limited recessing depth.

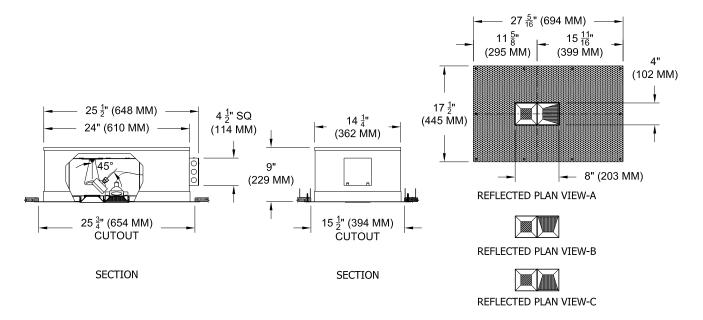

ORDERING INFORMATION

HOUSING	TRIM	TRANSFORMER	LENS HOLDER	LAMP LENS	TRIM FINISH	APERTURE LENS
1240AW2MR16-APH	ZT					
Shallow plaster housing AWA = Side WW AWB = Right WW AWC = Left WW	ZT = Zero Trim	EX = Electronic 120 EX2=2 Cir Elec 220 RX = Remote 240 TX= Magnetic 277	CL= Conical FL = Flat	90L = Clear 91L = Solite 92L = Supertex 93L = Sandblasted 95L = Full Prismatic	P14 = White BLK = Black PXXX = SLI Color XXXX = RAL # CST = Custom	91A = Solite 92A = Supertex 93A = Sandblasted 94A = Clear 95A = Full Prismatic

