RECTILINEAR APERTURE RECESSED WALL WASHER

1240WW-2LED-AD-PH

Dual lamp, solid state light engine, recessed wall washer with 4"x 8" (100mm x 200mm) rectilinear flangeless trim. Wallwashing in medium to tall ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction in sheetrock ceilings. AmbientDim™ provides Superior CRI at all dimming levels.

SPECIFICATIONS

HOUSING
- Precision die-formed heavy gauge aluminum

MOUNTING
- Install from below in sheetrock ceiling

ELECTRICAL
- Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers / Available for 120 phase control and Lutron

LAMP
- (2) AmbientDim™ LEDs supplied with fixture

SOCKET
- Precision aluminum yoke with CNC machined lampholder assembly

LENS
- Frosted Supertex borosilicate spread lens, hinged for relamping

TRIM
- Flangeless, two piece die-cast aluminum pyramidal shield

FINISH
- Black powder paint housing
- Aperture trim available in black and white as standard
- Solid wood, additional colors, RAL palette, custom finishes available

LABELS
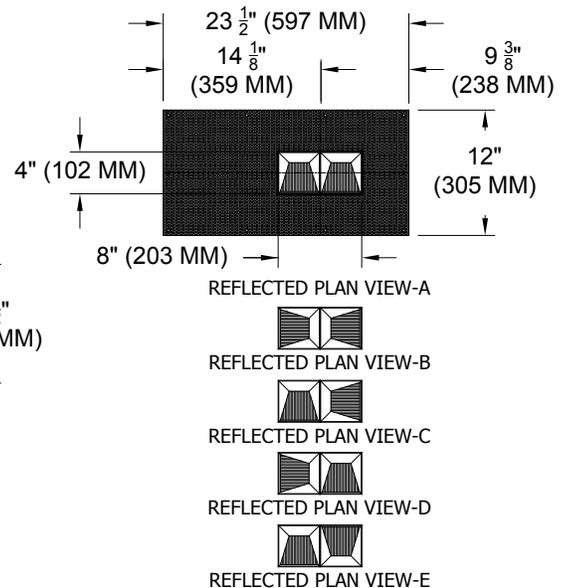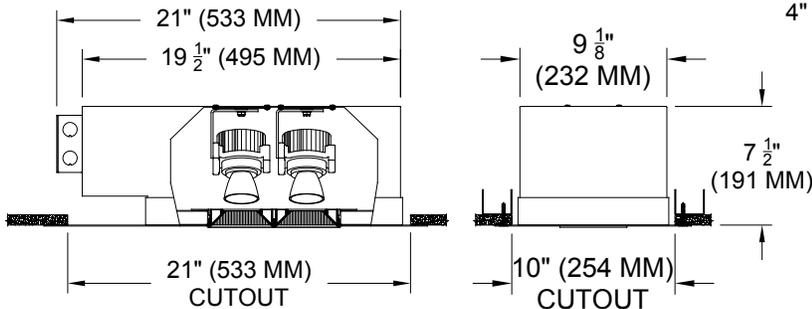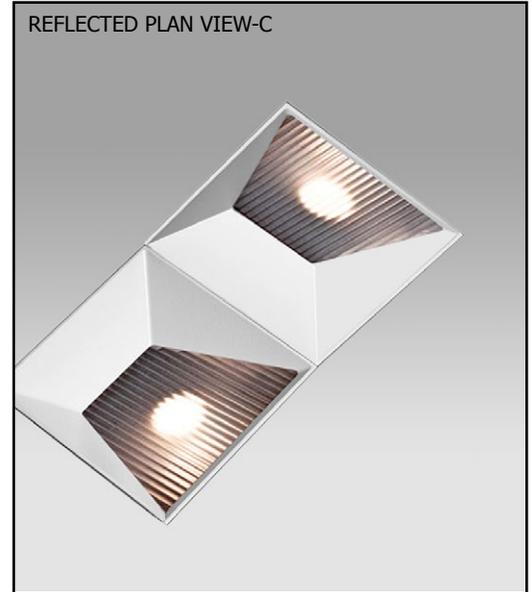- C(SP)US, US tested to UL standards 1598, Damp location

AmbientDim™

REFLECTED PLAN VIEW-C

23 ½" (597 MM)
14 ⅛" (359 MM)
9 ⅜" (238 MM)
4" (102 MM)
12" (305 MM)
8" (203 MM)

REFLECTED PLAN VIEW-A

REFLECTED PLAN VIEW-B

REFLECTED PLAN VIEW-C

REFLECTED PLAN VIEW-D

REFLECTED PLAN VIEW-E

21" (533 MM)
19 ½" (495 MM)
21" (533 MM) CUTOUT

9 ⅛" (232 MM)
7 ½" (191 MM)
10" (254 MM) CUTOUT

ORDERING INFORMATION

MODEL	PLAN VIEW	TRIM	SOURCE / DRIVER	TRIM FINISH	APERTURE LENS
1240WW-2LED-AD-PH		**ZT**	**AD14** /		**82A**
Plaster Housing Ambient Dimming LED *CCT Max 3000K-1900K	**WWA** = Double **WWB** = Opposite **WWC** = Left **WWD** = Right **WWE** = Cross	**ZT**=Zero Trim	**AD14**= 350ma, 14.5W, 1000lm **C1** =0-10V dimming, 1%, 120-277v **C2** =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) **E1** =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v **E2** =EldoLED DALI, 0.1%, 120-277v **E3** =EldoLED 0-10V Linear Dim, 0.1%, 120-277v **L2** =Ltm Hi-lume 1% 2-wr LED driver (120v fwrd phase) **LTB** =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black **LTP** =Lutron Hi-lume Premier 0.1% Fade-to-Black digital Ecosystem, 120-277v (PEQ0)	**P14** = White **BLK**=Black **PXX** = SLI Color **WXX** = Wood **XXXX** = RAL # **CST** = Custom	**82A**= Frosted Supertex

Patent Pending.
These specifications subject to change without notice.