RECTILINEAR APERTURE RECESSED WALL WASHER

1240WW-2LED-AD-UH

Dual lamp, solid state light engine, recessed wall washer with 4"x 8" (100mm x 200mm) rectilinear flangeless trim. Wallwashing in medium to tall ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction. Ambient-Dim™ provides Superior CRI at all dimming levels.

SPECIFICATIONS

HOUSING
• Precision die-formed heavy gauge aluminum

MOUNTING
• Recessed in architectural ceiling

ELECTRICAL
• Integral dimmable electronic driver with internal short circuit protection

LAMP
• (2) AmbientDim™ LEDs supplied with fixture

SOCKET
• Precision aluminum yoke with CNC machined lampholder assembly

LENS
• Frosted Supertex borosilicate spread lens, hinged for relamping

TRIM
• Flangeless, two piece die-cast aluminum pyramidal shield

FINISH
• Black powder paint housing
• Aperture trim available in black and white as standard
• Solid wood, additional colors, RAL palette, custom finishes available

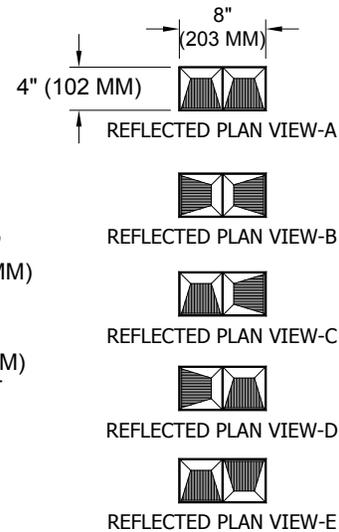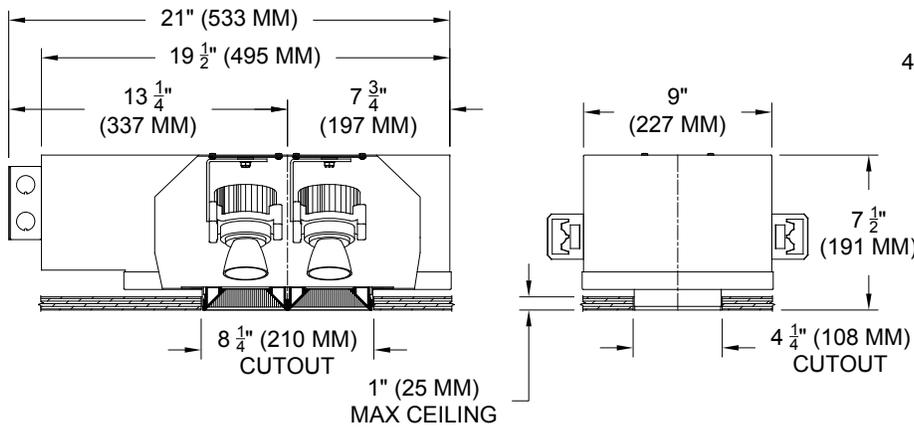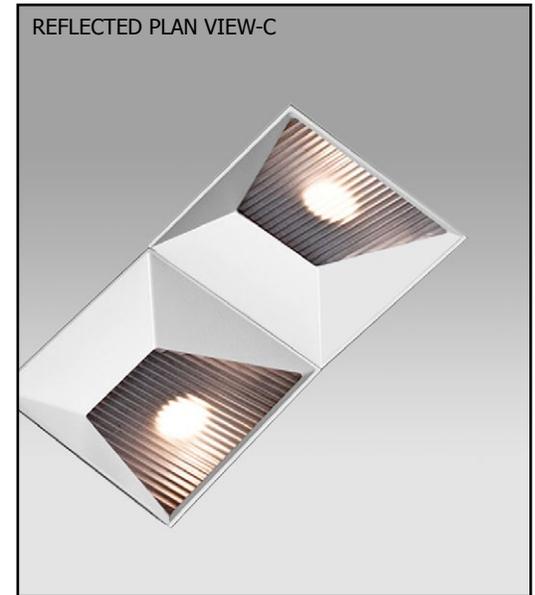### LABELS
• ⌀, US tested to UL standards 1598, Damp location

AmbientDim™

REFLECTED PLAN VIEW-C

8" (203 MM)
4" (102 MM)

REFLECTED PLAN VIEW-A

REFLECTED PLAN VIEW-B

REFLECTED PLAN VIEW-C

REFLECTED PLAN VIEW-D

REFLECTED PLAN VIEW-E

21" (533 MM)
19 1/2" (495 MM)
13 1/4" (337 MM)
7 3/4" (197 MM)
8 1/4" (210 MM) CUTOUT
1" (25 MM) MAX CEILING

9" (227 MM)
7 1/2" (191 MM)
4 1/4" (108 MM) CUTOUT

MODEL	PLAN VIEW	TRIM	SOURCE / DRIVER		TRIM FINISH	APERTURE LENS
1240WW-2LED-AD-UH			**AD14**	/		**82A**
Universal Housing Ambient Dimming LED *CCT Max 3000K-1900K	**WWA** = Double **WWB** = Opposite **WWC** = Left **WWD** = Right **WWE** = Cross	**ZT**=Zero Trim **PT**=Panel Trim** **WXX Only	**AD14**= 350ma, 14.5W, 1000lm **C1** =0-10V dimming, 1%, 120-277v **C2** =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) **E1** =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v **E2** =EldoLED DALI, 0.1%, 120-277v **E3** =EldoLED 0-10V Linear Dim, 0.1%, 120-277v **L2** =Ltm Hi-lume 1% 2-wr LED driver (120v fwrd phase) **LTB** =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black **LTP** =Lutron Hi-lume Premier 0.1% Fade-to-Black digital Ecosystem, 120-277v (PEQ0)		**P14** = White **BLK**=Black **PXX** = SLI Color **WXX** = Wood **XXXX** = RAL # **CST** = Custom	**82A**= Frosted Supertex