

RECTILINEAR APERTURE RECESSED WALL WASHER

1240WW-2LEDX-PH

Dual lamp, solid state light engine, recessed wall washer with nominal 4"x 8" (100mm x 200mm) rectilinear flangeless trim. Wallwashing in medium to tall ceiling heights typically found in commercial and retail applications. Suitable for new or existing construction in sheetrock ceiling.

SPECIFICATIONS

HOUSING

- Precision die-formed heavy gauge aluminum

MOUNTING

- Install from below in sheetrock ceiling

ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection

LAMP

- (2) Xicato LEDs supplied with fixture

SOCKET

- Precision aluminum yoke with CNC machined lampholder assembly

LENS

- Frosted Supertex borosilicate spread lens, hinged for relamping

TRIM

- Flangeless, two piece die-cast aluminum pyramidal shield




FINISH

- Black powder paint housing
- Aperture trim available in black and white as standard
- Solid wood, additional colors, RAL palette, custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location

JOB: _____
 SPECIFIER: _____
 TYPE: _____
 QUANTITY: _____
 SIGNATURE: _____

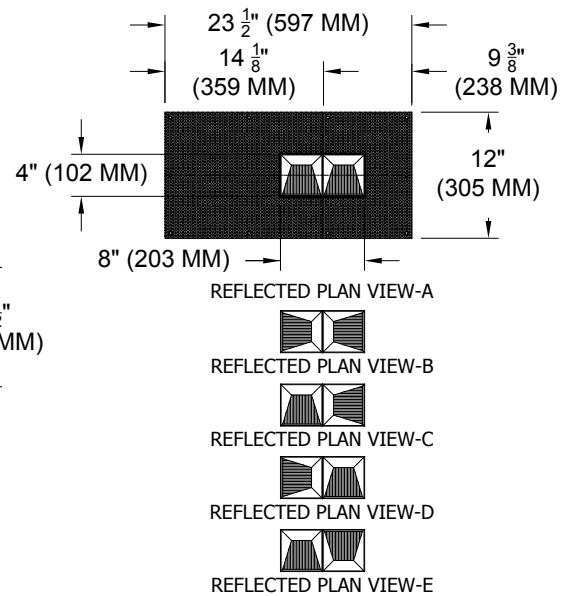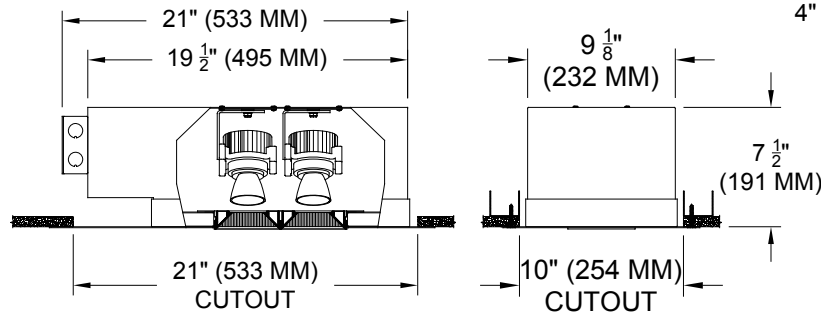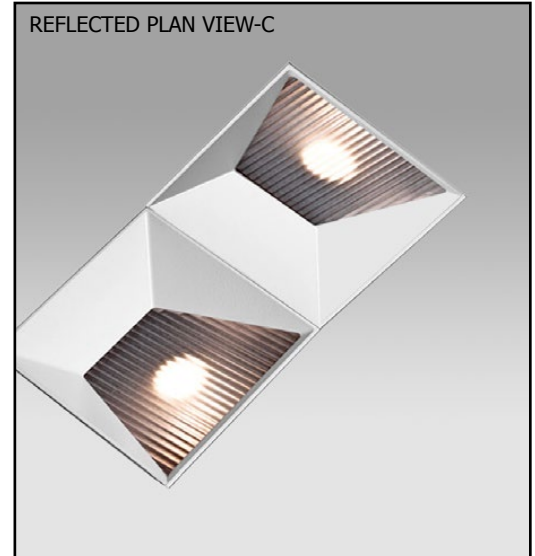

ORDERING INFORMATION

| 1240WW-2LEDX-PH | CRI / COLOR TEMP | TRIM | SOURCE / DRIVER | TRIM FINISH | APERTURE LENS |
|---|---|----------------------|---|--|-------------------------------|
| | | ZT | / | | 82A |
| WWA = Double WWB = Opposite WWC = Left WWD = Right WWE = Cross | Plaster Housing 8 = 80CRI 27 = 2700K 9 = 98CRI 30 = 3000K 35 = 3500K 40 = 4000K | ZT =Zero Trim | XT8 = 120v-277v, 8W 800lm XT12 = 120v-277v, 12W 1055lm XT17 = 120v-277v, 17W 1400lm XT26 = 120v-277v, 26W 2000lm C1 =0-10V dimming, 1%, 120-277v C2 =TRIAC/ELV 2-wire, 1% 120v (Lead/Trail Edge) E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2 =EldoLED DALI, 0.1%, 120-277v E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Lutron Hi-lume 1% 2-wire LED driver (120v forward phase) LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black | P14 = White BLK =Black PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom | 82A = Frosted Supertex |

Driver specs based on 98 CRI. [Click to View 80 CRI driver specs](#)