Twin lamp, low-voltage halogen recessed wall washer with nominal 4"x 8" rectangular 2 cell aperture and flangeless trim. Suitable for install from below applications.

1240WW-2MR16-APH

TYPE:

JOB:

SPECIFIER:

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with flangeless trim and integrated screed edge. Airtight construction suitable for direct contact with insulation. MOUNTING - Install from below in ins. sheetrock ceiling. **ELECTRICAL** - Integral dimmable torroidal magnetic transformer. 120v primary lead, (220v, 240v, 277v available), 11.75v secondary with overload protection. Remote transfomer available.

LAMP - (2) MR-16 NFL, 50w max. supplied by others. LABELS - CSA-C, US, Damp location ASTM E283 Airtight, suitable for direct contact with thermal insulation.


SOCKET - Precision die-formed aluminum socket plate. G4/G6 ceramic socket with high temperature, teflon coated lead wires.

LENS - Supertex borosilicate spread lens, hinged for relamping. Optional filters available for lampholder. TRIM - Flangeless, two piece die-cast aluminum pyramidal shield.

FINISH - Black powder paint housing. Aperture trim available in black and white as standard. Solid wood, additional colors and RAL palette available. Consult factory for custom finishes.

APPLICATIONS

Wallwashing in medium ceiling heights typically found in commercial and retail applications. Suitable for new or existing construction.

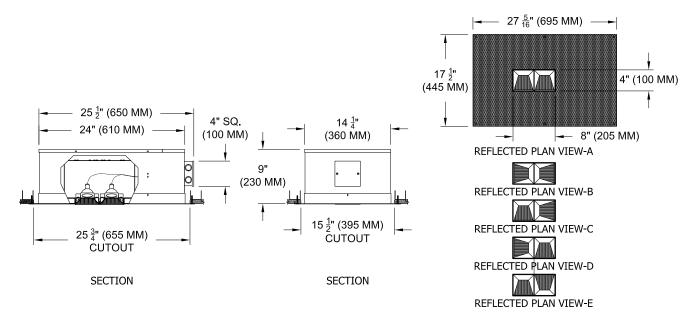

ORDERING INFORMATION

HOUSING	TRIM	TRANSFORMER		LAMP LENS	TRIM FINISH	APERTURE LENS
1240WW2MR16-APH		1				82A
Airtight Plaster Housing WWA = Double WWB = Opposite WWC = Left WWD = Right WWE = Cross	ZT = Zero Trim	EX2=2 Cir. 2 Electronic 2	120 220 240 277	98L = UV Filter	P14 = White PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	82A = Frosted Supertex



NOTE: These specifications subject to change without notice. www.specialtylightingindustries.com 1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 01/14