

Twin lamp, metal halide recessed wall washer with nominal 4"x8" rectangular 2 cell aperture and flangeless trim.

TYPE: _____

JOB: _____

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with extruded ceiling collar.

MOUNTING - Recessed in millwork or stone ceiling.

ELECTRICAL - Integral electronic ballast. 120v primary lead, (220v, 240v, 277v available). External thermoprotector.

LAMP - (2) GE MR-16 39w max. CMH supplied by others.

LABELS - CSA-C,US, Damp location

SOCKET - Precision die-formed aluminum socket plate. GX10 ceramic socket with high temperature, silicone coated lead wires.



LENS - Supertex borosilicate spread lens, hinged for relamping.

TRIM - Flangeless, two piece die-cast aluminum pyramidal shield.

FINISH - Black powder paint housing. Aperture trim stocked in black and white. Additional colors and RAL palette available. Consult factory for custom finishes. Wood trim available.

APPLICATIONS

Wallwashing in medium to tall ceiling heights typically found in commercial and retail applications. Suitable for new or existing construction. Zero trim can be used with in solid surface ceilings such as wood, stone, metal panel or glass.

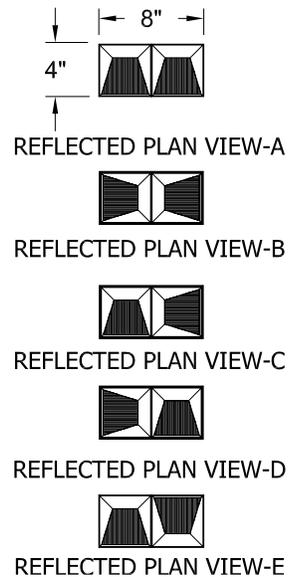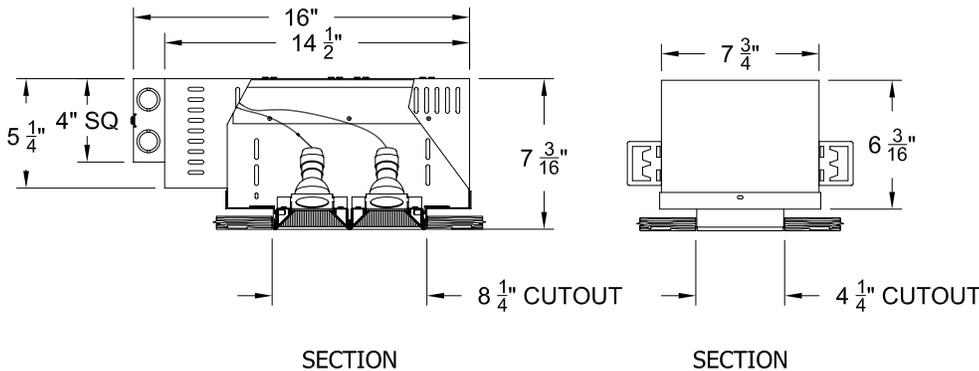

ORDERING INFORMATION

HOUSING	TRIM	BALLAST	FINISH	APERTURE LENS
1240WW_-2MR16MH-UH	ZT	WATTS/VOLTS		92A
Universal Housing WWA = Double WWB = Opposite WWC = Left WWD = Right WWE = Transverse	ZT = Flangeless trim	20/120 39/120 20/220 39/220 20/240 39/240 20/277 39/277	P14 = White PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	82A = Frosted Supertex



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 11/10