RECTILINEAR APERTURE RECESSED WALL WASHER

Dual lamp, solid state light engine, recessed wall washer with 4"x 8" (100mm x 200mm) rectilinear flangeless trim. Wallwashing in medium to tall ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction. Ambient-Dim[™] provides Superior CRI at all dimming levels.

SPECIFICATIONS

HOUSING

· Precision die-formed heavy gauge aluminum with perforated flangeless trim and integrated screed edge

MOUNTING

· Install from below in sheetrock ceiling

ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers / Available for 120 phase control and Lutron

LAMP

(2) AmbientDim[™] LEDs supplied with fixture

- Precision aluminum yoke with CNC machined lampholder assembly
- Ulsocket[™] allows easy field replacement of light engine

LENS

Frosted Supertex borosilicate spread lens, hinged for relamping


· Flangeless, two piece die-cast aluminum pyramidal shield


FINISH

- · Black powder paint housing
- · Aperture trim available in black and white as standard
- · Solid wood, additional colors, RAL palette, custom finishes available

LABELS

, US tested to UL standards 1598, Damp location

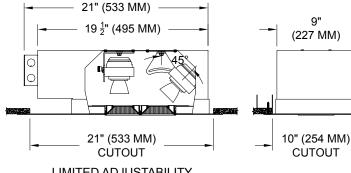





JOB: SPECIFIER: TYPE: **QUANTITY:** SIGNATURE:

1249WW-2LED-AD-PH

AmbientDim™

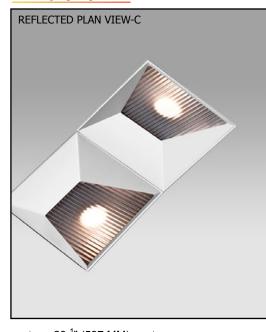

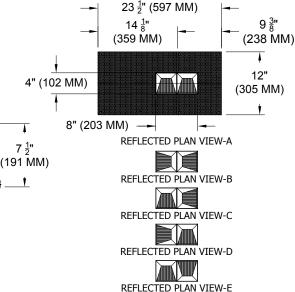

PLAN VIEW TRIM FINISH **APERTURE LENS** MODEL DRIVER 1249WW-2LED-AD-PH ZΤ AD14 82A WWA = Double ZT=Zero Trim AD14=350ma, 14.5W, 1000lm **P14** = White 82A= Frosted Supertex Plaster Housing **BLK**=Black Ambient Dimming LED **WWB** = Opposite *Add DM2 for 2 wire dimming WWC = Left PXX = SLI Color *Add LT2 for Lutron 2 wire WXX = WoodWWD = Right *Add LT3 for Lutron 3 wire XXXX = RAL # Max 3000K-1900K WWE = Cross *Add LT5 for Lutron 5 wire *Add LTB for Lutron Fade-to-Black CST = Custom

(227 MM)

CUTOUT



ORDERING INFORMATION

Patent Pending. These specifications subject to change without notice.