

# RECTILINEAR APERTURE RECESSED WALL WASHER

1249WW-2LEDZ-APH

Dual lamp, solid state light engine, recessed wall washer with nominal 4"x 8" (100mm x 200mm) rectilinear flangeless trim. Wallwashing in medium to tall ceiling heights typically found in commercial and retail applications. Suitable for new or existing construction in sheetrock ceiling.

## SPECIFICATIONS

### HOUSING

- Precision die-formed heavy gauge aluminum with perforated flangeless trim and integrated screed edge
- Airtight construction suitable for direct contact with insulation

### MOUNTING

- Install from below in sheetrock ceiling

### ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers / Available for 120 phase control and Lutron

### LAMP

- (2) Citizen LEDs supplied with fixture
- Available in 2700 thru 4000K color temperature and 90+ CRI

### SOCKET

- Precision aluminum yoke with CNC machined lampholder assembly
- Usocket™** allows easy field replacement of light engine

### LENS

- Frosted Supertex borosilicate spread lens, hinged for relamping


### TRIM




- Flangeless, two piece die-cast aluminum pyramidal shield

### FINISH

- Black powder paint housing
- Aperture trim available in black and white as standard
- Solid wood, additional colors, RAL palette, custom finishes available

### LABELS

-  , US tested to UL standards 1598, Damp location, IC/Airtight

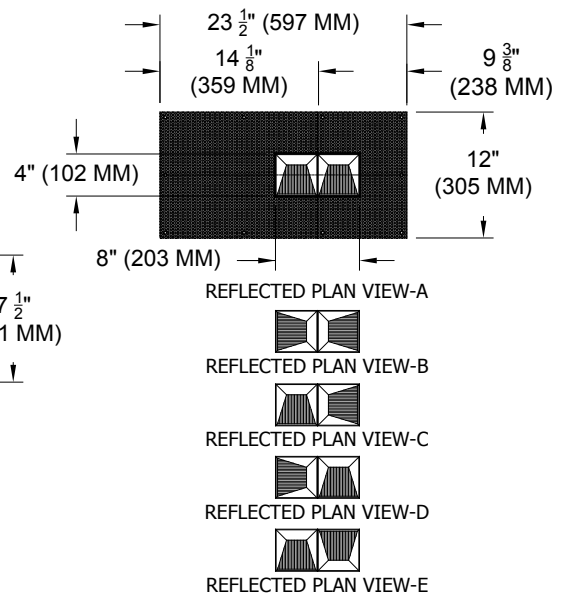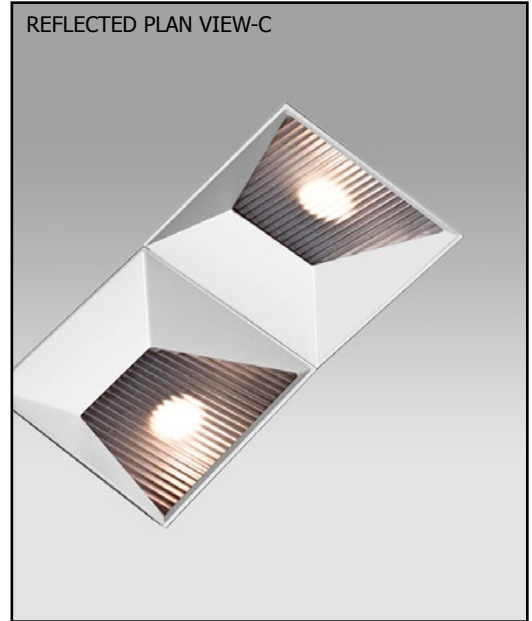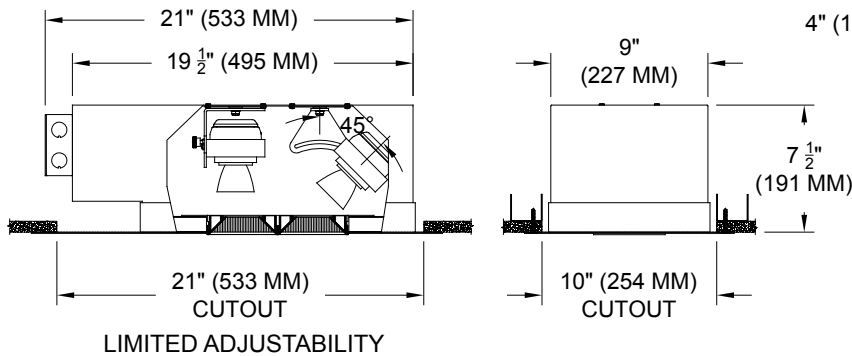

## ORDERING INFORMATION

1249WW-2LEDZ-APH	CRI / COLOR TEMP	TRIM	DRIVER	TRIM FINISH	APERTURE LENS
		ZT			82A
<b>WWA</b> = Double <b>WWB</b> = Opposite <b>WWC</b> = Left <b>WWD</b> = Right <b>WWE</b> = Cross	Airtight Plaster Housing <b>9</b> = 90+CRI <b>27</b> = 2700K <b>30</b> = 3000K <b>35</b> = 3500K <b>40</b> = 4000K	ZT=Zero Trim	<b>CZ14</b> =120-277v, 14W 1100lm <b>CZ20</b> =120-277v, 20W 1650lm <b>CZ28</b> =120-277v, 28W 2200lm *Add <b>ELDO</b> for EidoLED 0-10v Dimming *Add <b>DM2</b> for 2 wire dimming *Add <b>LT2, LT3, LT5</b> for Lutron 2 wire, Lutron 3 wire, Lutron 5 wire dimming, <b>LTB</b> for Lutron Fade-to-Black	<b>P14</b> = White <b>BLK</b> =Black <b>PXX</b> = SLI Color <b>WXX</b> = Wood <b>XXXX</b> = RAL # <b>CST</b> = Custom	<b>82A</b> = Frosted Supertex



Patent Pending.  
These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 Doris Avenue, Ocean, NJ 07712 USA

800.462.7812 732.517.0800 FAX:732.517.0971

07/17