RECTILINEAR APERTURE RECESSED WALL WASHER

1249WW-2LEDZ-UH

Dual lamp, solid state light engine, recessed wall washer with nominal 4"x 8" (100mm x 200mm) rectilinear flangeless trim. Wallwashing in medium to tall ceiling heights typically found in commercial and retail applications. Suitable for new construction.

SPECIFICATIONS

HOUSING

Precision die-formed heavy gauge aluminum with extruded ceiling collar

MOUNTING

· Recessed in architectural ceiling

ELECTRICAL

- · Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers / Available for 120 phase control and Lutron

LAMP

- · (2) Citizen LEDs supplied with fixture
- Available in 2700 thru 4000K color temperature and 90+ CRI

SOCKET

- · Precision aluminum yoke with CNC machined lampholder assembly
- Ulsocket[™] allows easy field replacement of light engine

LENS

• Frosted Supertex borosilicate spread lens, hinged for relamping


· Flangeless, two piece die-cast aluminum pyramidal shield


FINISH


- · Black powder paint housing
- · Aperture trim available in black and white as standard
- · Solid wood, additional colors, RAL palette, custom finishes available

LABELS

• (§) , US tested to UL standards 1598, Damp location









JOB:


SPECIFIER:







REFLECTED PLAN VIEW-E

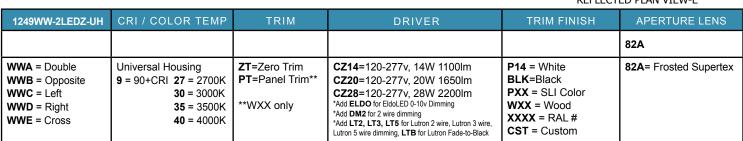



Patent Pending. These specifications subject to change without notice.