

Single lamp, low-voltage halogen recessed wall washer with nominal 4" (100mm) conical aperture.

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING** - Precision die-formed heavy gauge aluminum with machined adjustable ceiling collar.

**MOUNTING** - Recessed in architectural ceiling.

**ELECTRICAL** - External thermoprotector. For use with remote transformer. Transformer should be sized for the run length and ordered separately.

**LAMP** - MR-16, 50w max. supplied by others.

**LABELS** - CSA-C,US, Damp location, Wet with ST trim.

**SOCKET** - Precision die-formed aluminum socket plate. G4/G6 ceramic socket with high temperature, teflon coated lead wires.


**LENS** - Supertex borosilicate spread lens, hinged for relamping. Alzak Kick reflector. Optional UV lens available

**TRIM** - Flanged or flangeless ceiling collar. Die-cast aluminum conical shield. ST trim fully sealed and gasketed.

**FINISH** - Black powder paint housing. Aperture trim available in black and white as standard. Solid wood, additional colors and RAL palette available. Consult factory for custom finishes.

**APPLICATIONS**

Wallwashing in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction .

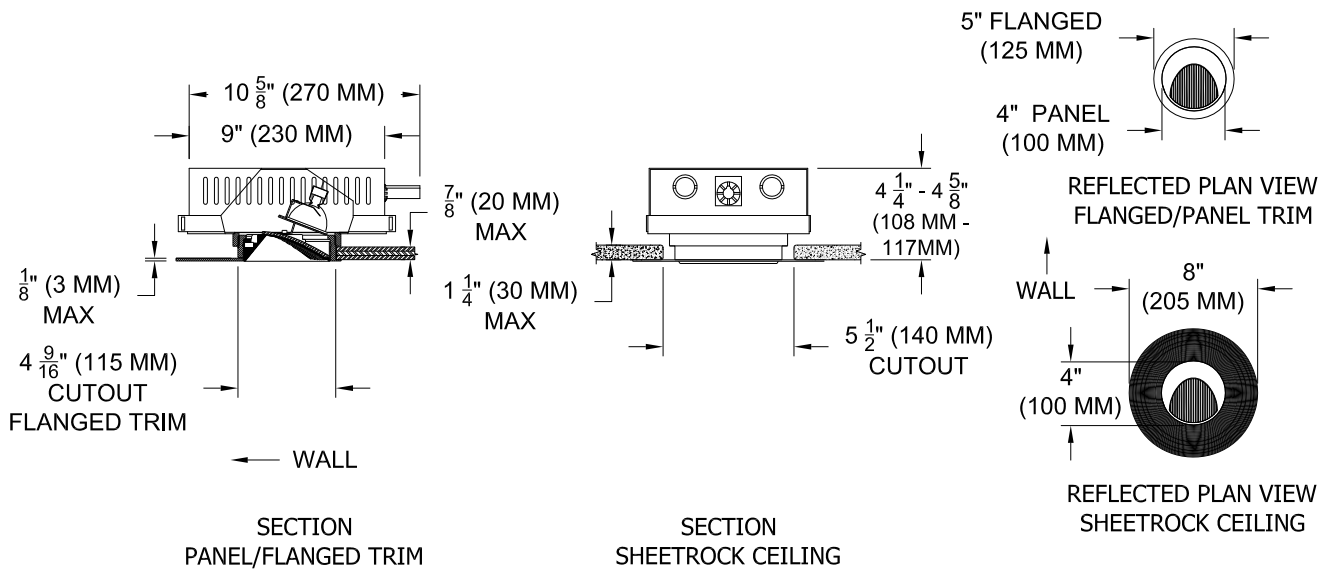

**ORDERING INFORMATION**

HOUSING	TRIM	TRANSFORMER	LAMP LENS	TRIM FINISH	APERTURE LENS	
1250-MR16-TUH		RX /			82A	
Thin Universal Housing	FT = Flanged Trim PT = Panel Trim ST = Shower Trim ZT = Zero Trim	RX = Remote	120 277	Blank = None 98L = UV Filter	P14 = White PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	82A = Frosted Supertex



**SPECIALTY LIGHTING INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 07/11