

Pendant mounted adjustable gimbal multi-led fixture. Lamp heads are gimbal adjustable along two axis.

**JOB:** \_\_\_\_\_  
**SPECIFIER:** \_\_\_\_\_  
**TYPE:** \_\_\_\_\_  
**QUANTITY:** \_\_\_\_\_  
**SIGNATURE:** \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING**

- Die-cast aluminum

**MOUNTING**

- Pendant

**ELECTRICAL**

- Integral dimmable electronic driver with internal short circuit protection

**LAMP**

- Citizen LEDs supplied with fixture
- Available in 2700 thru 4000K color temperature and 90+ CRI

**SOCKET**

- Precision aluminum yoke with CNC machined lampholder assembly
- **Usocket™** allows easy field replacement of light engine


**LENS**


- Multiple beamspreads. Optional borosilicate lenses available for aperture.

**FINISH**

- Available in black and white as standard
- Additional colors and RAL palette available
- Consult factory for custom finishes

**LABELS**

-  , US tested to UL standards 1598, Damp location

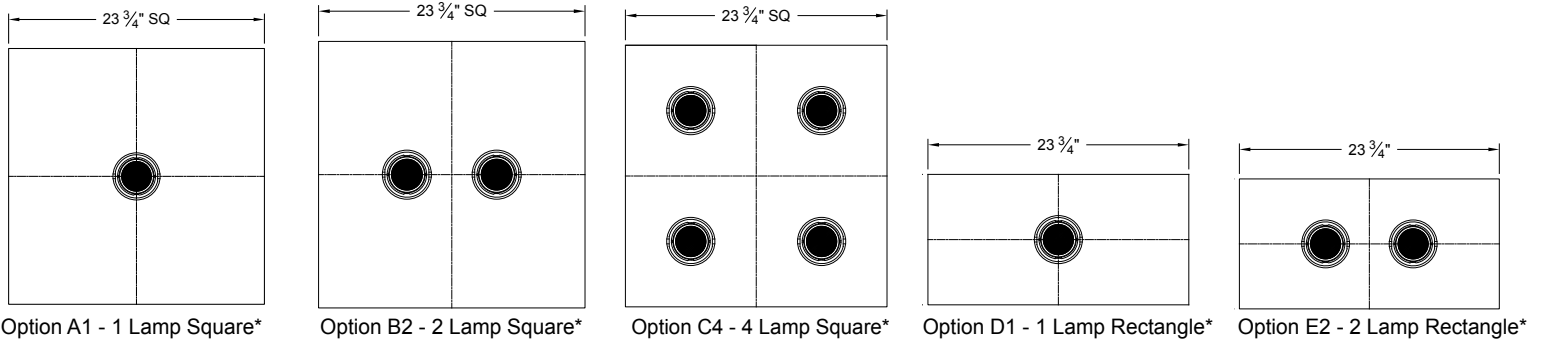

\*See Page 2 for more detailed drawings


**ORDERING INFORMATION**

1652-LEDZ-SH_	COLOR TEMP	SOURCE / DRIVER	BEAMSPREAD	HOUSING / HEAD FINISH	LENGTH
		/		/	/
Surface Housing Pendant Mount <b>A1</b> = 1 Lamp Square <b>B2</b> = 2 Lamp Square <b>C4</b> = 4 Lamp Square <b>D1</b> = 1 Lamp Rectangle <b>E2</b> = 2 Lamp Rectangle	<b>9</b> = 90+CRI <hr/> <b>27</b> = 2700K <b>30</b> = 3000K <b>35</b> = 3500K <b>40</b> = 4000K	<b>38CZ12</b> = 120v-277v, 12W 1750lm <b>38CZ16</b> = 120v-277v, 16W 2400lm <b>38CZ24</b> = 120v-277v, 24W 3700lm <hr/> <b>S1</b> =0-10V dimming, 1%, 120-277v <b>T1</b> =TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge) <b>E1</b> =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v <b>E2</b> =EldoLED DALI, 0.1%, 120-277v <b>E3</b> =EldoLED 0-10V Linear Dim, 0.1%, 120-277v <b>L2</b> =Ltrn Hi-lume 1% 2-wr LED driver (120v frwd phase) <b>L3</b> =Lutron Hi-lume 1% 3-wire/EcoSystem, 120-277v <b>LTB</b> =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	<b>15</b> = 15 Degrees <b>24</b> = 24 Degrees <b>38</b> = 38 Degrees <b>60</b> = 60 Degrees	<b>P14</b> = White <b>BLK</b> =Black <b>ANA</b> = Clear Aluminum <b>CST</b> = Custom	<b>CM</b> = Cable Mount <b>PM</b> = Pendant Mount <hr/> <b>12</b> = 12" <b>24</b> = 24" <b>36</b> = 36" <b>48</b> = 48" <b>60</b> = 60" <b>84</b> = 84"




Patent Pending.  
 These specifications subject to change without notice.


**www.specialtylightingindustries.com**  
 1306 Doris Avenue, Ocean, NJ 07712 USA  
 800.462.7812 732.517.0800 FAX:732.517.0971

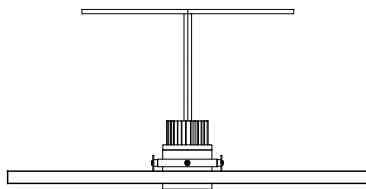


Option A1 - 1 Lamp Square

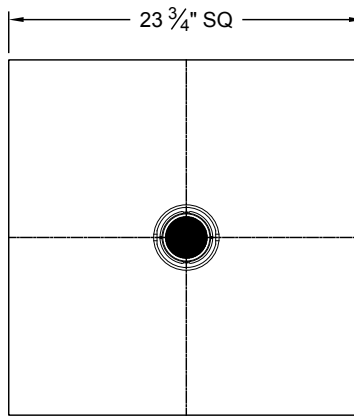




REFLECTED PLAN VIEW

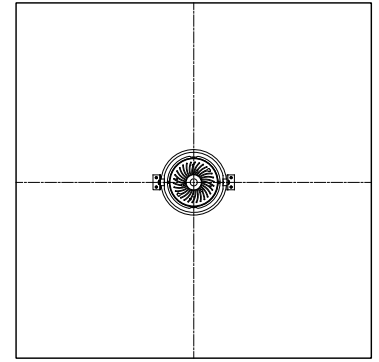




TOP VIEW

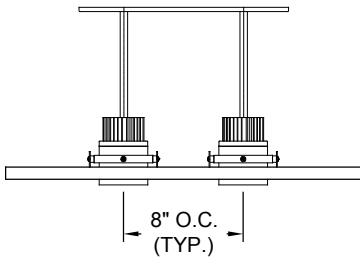




Option B2 - 2 Lamp Square

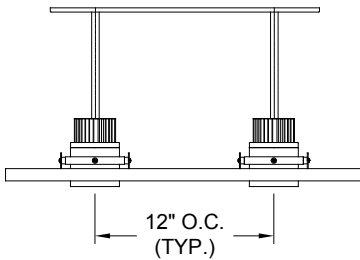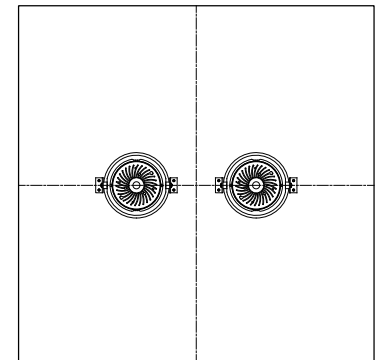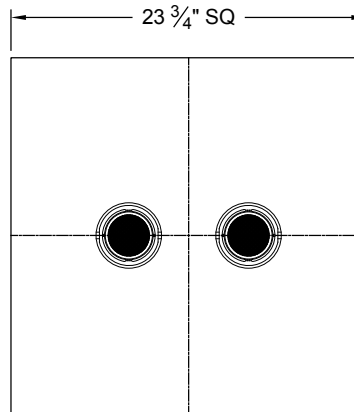

Option C4 - 4 Lamp Square

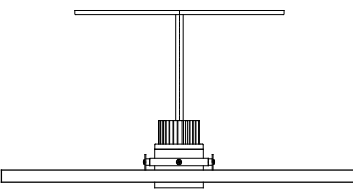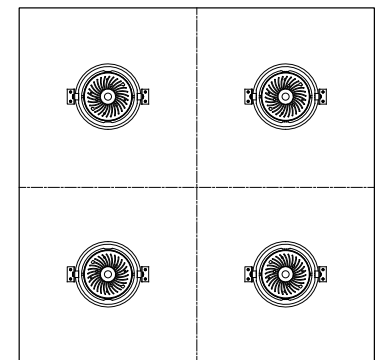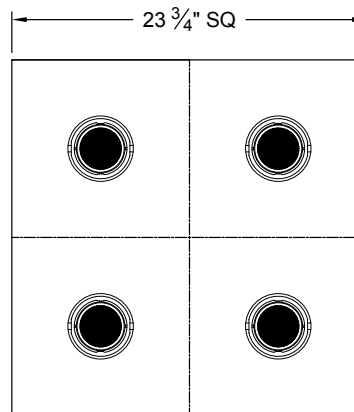

Option D1 - 1 Lamp Rectangle

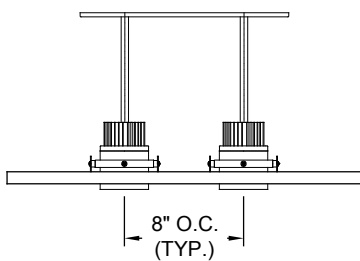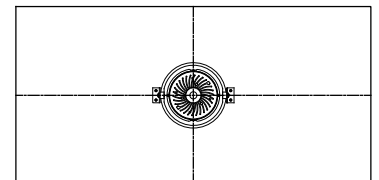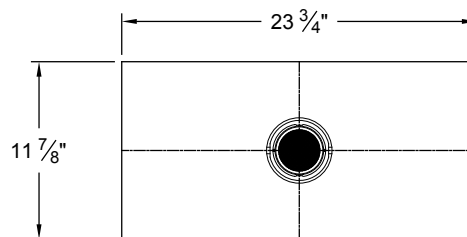

Option E2 - 2 Lamp Rectangle

