
Fully recessed extruded aluminum accent light housing available in a variety of aperture sizes to accommodate a large range of linear and point sources. Three circuit wireway provides power for a wide array of lighting elements that can be located anywhere along the length of the housing. Optional fourth circuit for indirect ambient light. Available in flanged and flangeless trims and with optional aperture lenses.

Useful in applications such as museum, retail and residential environments; the system is totally flexible with lighting elements that may be easily changed in the field to respond to varying architectural conditions. The 3000 series is a tool that allows the designer to create a unified design that is easier to understand and results in a space that is more comfortable to inhabit.



COMPATIBILITY GUIDE

Model	Aperture	Height Dimensions	Direct Component	Indirect Option
3074	4"	6 ⁷ /8"	ALR12, ALR56, LED, MR16, MR16MH, T4MH	LED, T3, T5, T8
3094	4"	9"	All of the above plus PAR20, PAR20MH, PAR30	LED, T3, T5, T8
3096	6"	9"	All of the above plus AR111, PAR36, PAR30MH	LED, T3, T5, T8

TECHNICAL SHEET REFERENCE

Use the model, lamp and housing code to find the technical sheet for the exact configuration you need. i.e. 3074-PH-DD

Find technical sheets at www.specialtylightingindustries.

Model	Housing	Trim
3074	PH	DD
3094		
3096		

RELATED PRODUCTS

Elements 3200, 3300, 3400

Down light 4009, 4017


Accent light 1009, 4009

Wall washer 1240

ACCESSORIES

Aperture lenses Mitered corners Custom Lengths



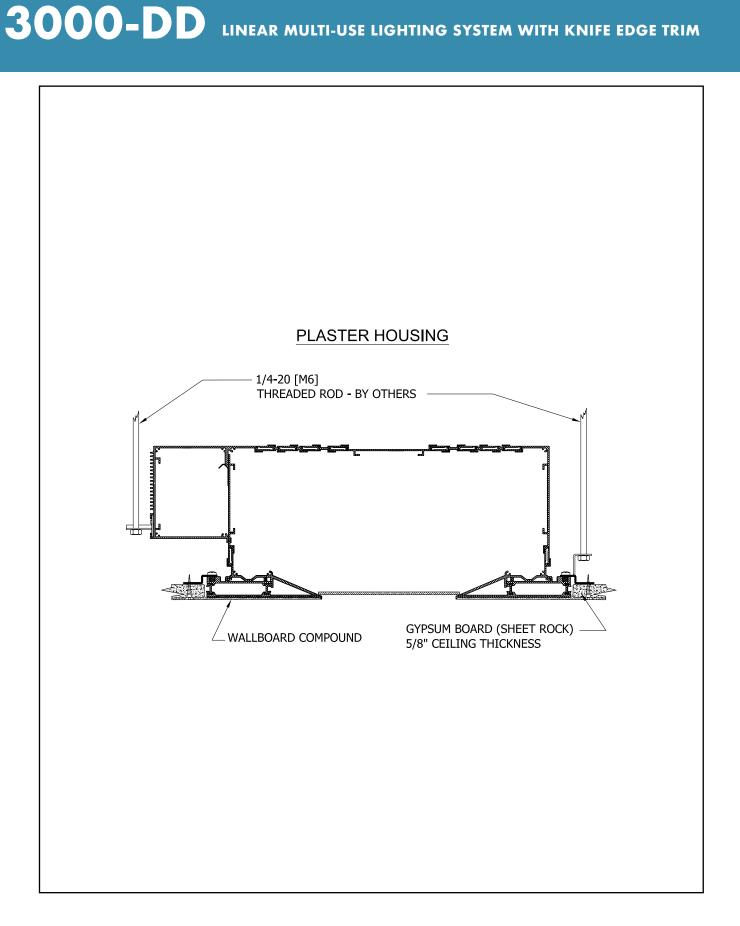



Patent Pending. These specifications subject to change without notice.