

SPECIFICATIONS

HOUSING - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Welded aluminum end plate, no visible seam.



REFLECTOR - Semi-specular, low iridescence, aluminum.

ELECTRICAL - T5, integral electronic ballast, 120/277v (dimmbable available.)

SOCKET - G5, 600v, 120w, with rotor for secure lamp retention.

APPLICATIONS

Art lighting designed to evenly illuminate standard size works of art (up to 4' tall.) Can also be used as indirect ceiling/cover lighting.

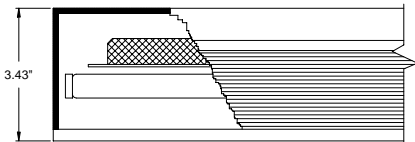

TYPE: _____
JOB: _____

MOUNTING - Cantilevered, see mounting options next page.

LENS - Supertex, acrylic.

LABELS - UL, CUL, - Dry Location.

LAMP - T-5 - by others.

FINISH - Powder paint or aluminum. Lacquer top coat. RAL colors standard, consult factory for custom finishes.

ORDERING INFORMATION

FIXTURE	LAMP	LENGTH	PROJECTION	MOUNTING OPTIONS	FINISH
#304FL					
Tubular pendant art light	14T5 = 14w 21T5 = 21w 28T5 = 28w 24HOT5 = 24w HO 39HOT5 = 39w HO 54HOT5 = 54w HO	specify exact length	specify exact length	A = Cord & plug B = J-box C = Through panel E = End swivel	WHT = White BLK = Black XXXX = RAL # CST = Custom paint (must supply chip) PA = Polished aluminum SA = Satin aluminum



SPECIALTY LIGHTING
 INDUSTRIES, INC.