

Single lamp, solid state light engine, surface mounted down light with nominal 4"(102mm) aperture. General downlighting in medium to high ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction.

SPECIFICATIONS

HOUSING

- Heavy wall extruded aluminum tube with machined adjustable ceiling collar

MOUNTING

- Surface, Cable or Pendant mounted

ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers
- 2-wire dimming TRIAC ELV, consult factory

LAMP

- Citizen or AmbientDim™ LED supplied with fixture


TRIM

- Clear semi-specular anodized aluminum reflector

FINISH

- Housing available in black and white as standard
- Additional colors, RAL palette, custom finishes

LABELS

-  , US tested to UL standards 1598, Wet or Damp location


JOB: _____

SPECIFIER: _____

TYPE: _____

QUANTITY: _____

SIGNATURE: _____

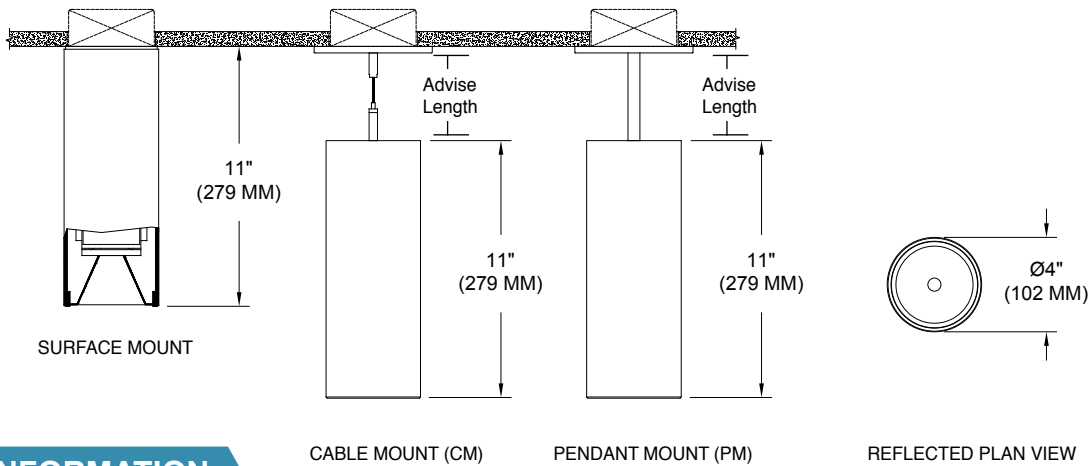

ORDERING INFORMATION

4013-LED-SH	SOURCE / DRIVER	BEAMSPREAD	FINISH	LENS	ACCESSORIES / TRIM
	/				/
9 = 90CRI 27 =2700K 30 =3000K 35 =3500K 40 =4000K	CZ14 =120-277v, 14W 1100lm CZ20 =120-277v, 20W 1650lm AD14 =350ma, 14.5W,1000lm <hr/> C1 =0-10V dimming, 1%, 120-277v C2 =TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge) E1 =EldoLED 0-10V Logarithmic Dim, 0.1%, 120-277v E2 =EldoLED DALI, 0.1%, 120-277v E3 =EldoLED 0-10V Linear Dim, 0.1%, 120-277v L2 =Ltrn Hi-lume 1% 2-wr LED driver (120v fwd phase) L3 =Lutron Hi-lume 1% 3-wire/EcoSystem, 120-277v LTB =Lutron Hi-lume 1% EcoSys LED driver, 1%, 120-277v, Soft-on, Fade-to-Black	24 = 24 Degrees 38 = 38 Degrees	P14 = White BLK =Black PXX = SLI Color XXXX = RAL # CST = Custom	91A = Solite	CM = Cable Mount PM = Pendant Mount Mount Length 12" 24" 36" 48" CST <hr/> ST = Shower Trim* *Lens required
AD = Ambient Dim Max 3000K-1900K					



Patent Pending.
 These specifications subject to change without notice.

www.specialtylightingindustries.com
 1306 Doris Avenue, Ocean, NJ 07712 USA
 800.462.7812 732.517.0800 FAX:732.517.0971