Single lamp, compact fluorescent, recessed accent light with nominal 6.5" square aperture, beveled trim and 5.5" glass diffuser.

### TYPE:

\_\_\_\_\_

JOB:

SPECIFIER:

#### SPECIFICATIONS

**HOUSING** - Precision die-formed heavy gauge aluminum. Airtight construction suitable for direct contact with insulation.

**MOUNTING -** Recessed in insulated architectural ceiling. **ELECTRICAL -** Integral electronic, thermally protected ballast. 120v, 277v, (220v 240v, available). Dimming ballast available.

LAMP - Triple tube compact fluorescent

LABELS - CSA-C,US, Damp Location, Wet with ST trim.

APPLICATIONS


**SOCKET** - GX24q PBT socket with high temperature, teflon coated lead wires.

**LENS -** Solite borosilicate glass. Others available consult factory

**TRIM -** Flanged or flangeless, extruded aluminum regressed lensed trim. ST trim fully sealed and gasketed.

**FINISH** - Black powder paint housing. Aperture trim available in black and white as standard. Solid wood, additional colors and RAL palette available. Consult factory for custom finishes.

# Downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction. Zero trim can be used with in solid surface ceilings such as wood, stone, metal panel or glass.

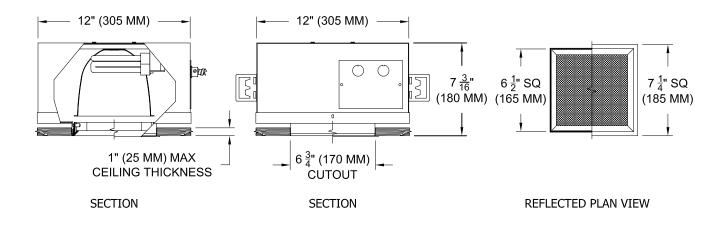

### ORDERING INFORMATION

HOUSING	TRIM	VOLTAGE	TRIM FINISH	APERTURE LENS
4014-CFAUH				
Airtight Universal Housing. <b>18 =</b> 18 Watt <b>24 =</b> 24 Watt <b>32 =</b> 32 Watt	<b>FT</b> = Flanged Trim <b>ST</b> = ShowerTrim <b>ZT</b> = Zero Trim	120 220 240 277 add DM for dimming	P14 = White PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	<ul> <li>91A = Solite</li> <li>92A = Supertex</li> <li>93A = Sandblasted</li> <li>95A = Full Prismatic</li> <li>99A = White Opal</li> </ul>



## 4014-CF-AUH