

Single lamp, solid state light engine, recessed accent light with nominal 4" (100mm) square aperture, beveled trim and 3" (75mm,)glass diffuser.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Precision die-formed heavy gauge aluminum with adjustable mounting bracket and die-cast ceiling collar.

SOCKET - LED module can be replaced in the field.

MOUNTING - Recessed in architectural ceiling.

ELECTRICAL - Integral dimmable electronic driver with internal short circuit protection. 120v-277v primary, compatible with 0-10v dimmers.

LENS - Interchangeable reflector provides multiple beam patterns. Optional borosilicate lenses available for aperture.

TRIM - Flanged or flangeless, one piece die-cast aluminum pyramidal shield. ST trim fully sealed and gasketed.


LAMP - BridgeLux LED supplied with fixture. Available in 2700 or 3000K color temperature and 80 or 97 CRI.

FINISH - Black powder paint housing. Aperture trim available in black and white as standard. Solid wood, additional colors and RAL palette available. Consult factory for custom finishes.

LABELS - CSA-C,US, Damp location, Wet with ST trim.

APPLICATIONS

General downlighting in medium to high ceiling heights typically found in residential, commercial and retail applications. Suitable for new construction. Zero trim can be used with in solid surface ceilings such as wood, stone, metal panel or glass.

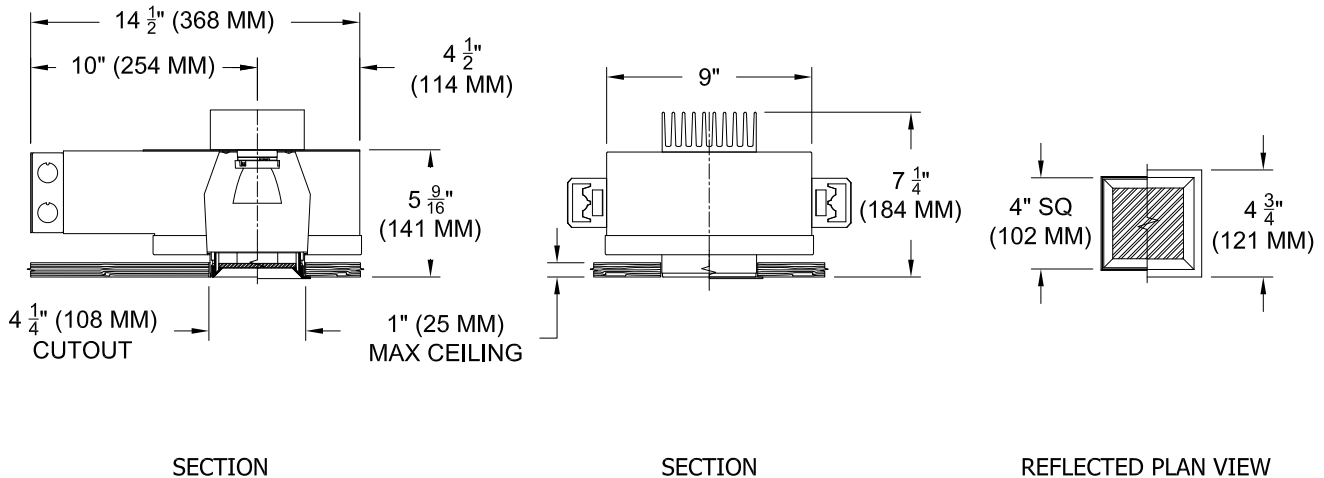

ORDERING INFORMATION

HOUSING	TRIM	DRIVER	BEAMSPREAD	TRIM FINISH	APERTURE LENS
4014-LEDB__-UH					
Universal Housing 8 = 80CRI 27 = 2700K 9 = 97CRI 30 = 3000K 35 = 3500K 40 = 4000K	FT = Flanged Trim ST = Shower Trim ZT = Zero Trim	123 = 120v-277v 125 = 120v-277v HE 127 = 120v-277v HO 1210 = 120v-277v VHO	15 = 15 Degrees 24 = 24 Degrees 38 = 38 Degrees 60 = 60 Degrees	P14 = White PXX = SLI Color WXX = Wood XXXX = RAL # CST = Custom	Blank = None 91A = Solite 92A = Supertex 93A = Frosted 95A = Full Prismatic

[CLICK HERE](http://www.specialtylightingindustries.com) for LED and driver performance information including wattage and lumen output or go to www.specialtylightingindustries.com.



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 03/14