

Multi-lamp, low voltage halogen, recessed linear downlight with nominal 5" (120mm) wide aperture, fixed socket plate and borosilicate supertex spread lens.

## SPECIFICATIONS

### HOUSING

- Extruded aluminum housing with ultrim plaster frame

### MOUNTING

- Install from below in sheetrock ceiling

### ELECTRICAL

- Fixture comes with terminal block for connection to remote transformer
- Transformer should be sized for the run length and ordered separately

### LAMP

- MR-16 spot 74w max per foot - supplied by others

### SOCKET

- Precision die-formed aluminum socket plate
- G4/G6 ceramic socket or nickel plated steel double contact bayonet base with stainless steel spring for optimum contact. High temperature lead wires.

### LENS

- Supertex borosilicate glass. Others available consult factory



### TRIM

- Regress trim integral to housing

### FINISH

- Powder paint on all surfaces in black and white as standard
- Additional colors and RAL palette available. Consult factory for custom finishes

### LABELS

-  , US tested to UL standards 1598, Damp location, Wet with ST trim/LC, 







**JOB:** \_\_\_\_\_

**SPECIFIER:** \_\_\_\_\_

**TYPE:** \_\_\_\_\_

**QUANTITY:** \_\_\_\_\_

**SIGNATURE:** \_\_\_\_\_

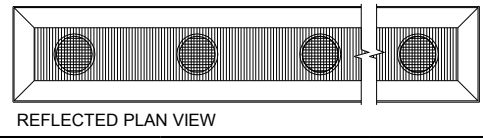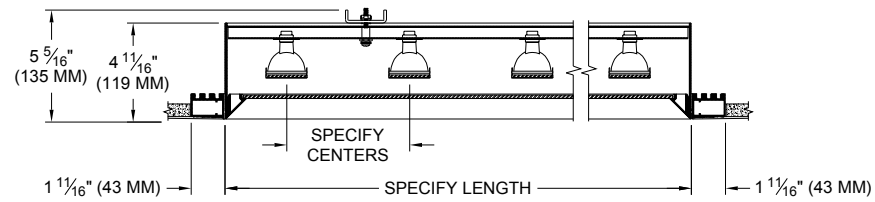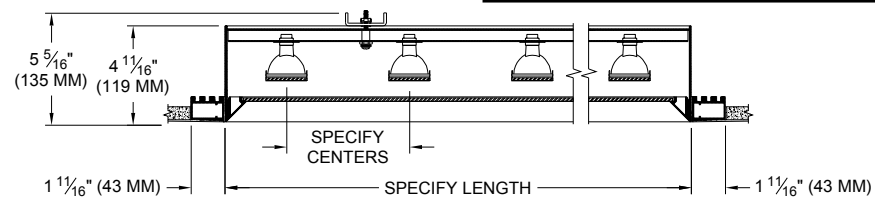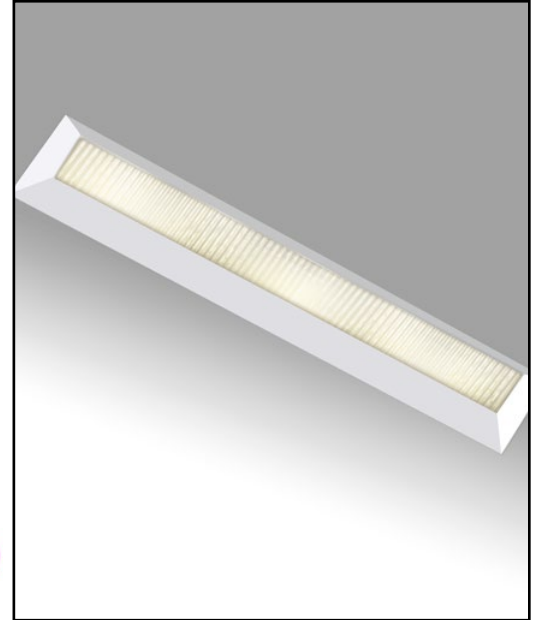

## ORDERING INFORMATION

415-MR16-PH	LAMP SPACING	LENGTH	TRANSFORMER	FINISH	APERTURE LENS	ACCESSORIES
			RX			
Plaster Housing 20MR =20W, MR16 37MR =37W, MR16*	4" = 4" 6" = 6" or custom spacing	Specify exact length	RX=Remote	P14 = White BLK=Black PXX = SLI Color XXXX = RAL # CST = Custom	82A = Frosted Supertex 92A = Supertex	ST= Shower Trim LC = Lens Clip U3 = 3 Side Ultrim U4 = 4 Side Ultrim
*6" O.C. Only						



Patent Pending.  
These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)  
1306 Doris Avenue, Ocean, NJ 07712 USA  
800.462.7812 732.517.0800 FAX:732.517.0971  
03/17