

Single lamp, solid state light engine, decorative mounted down light, nominal 3" (77mm) aperture. General downlighting in low to medium ceiling heights typically found in residential, commercial and retail applications. Suitable for new or existing construction.

## SPECIFICATIONS

### HOUSING

- Heavy wall extruded aluminum tube with machined adjustable ceiling collar

### MOUNTING

- Surface, cable, pendant mounted

### ELECTRICAL

- Remote dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers
- Consult factory for other options

### LAMP

- Citizen or Ambient Dim™ LED supplied with fixture
- Available in 2700 thru 4000K color temperature and 90+CRI

### SOCKET

- Removable lamp cassette simplifies installation and permits easy access for maintenance
- Ulssocket™** allows easy field replacement of light engine

### LENS

- Interchangeable reflector provides multiple beam patterns


### TRIM

- Clear semi-specular anodized aluminum reflector

### FINISH



- Additional colors, RAL palette, custom finishes available

### LABELS

-  US, US tested to UL standards 1598, Damp location

JOB: \_\_\_\_\_  
 SPECIFIER: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_  
 SIGNATURE: \_\_\_\_\_

 AmbientDim™

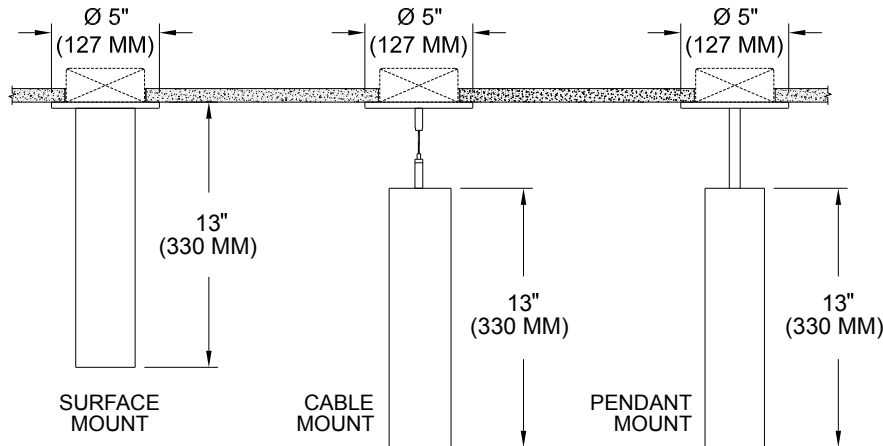

REFLECTED PLAN VIEW

## ORDERING INFORMATION

4700-LED_-SH	SOURCE / DRIVER	BEAMSPREAD	TRIM FINISH	ACCESSORIES
	/			
<b>Citizen</b> <b>9</b> = 90+CRI <b>27</b> = 2700K <b>30</b> = 3000K <b>35</b> = 3500K <b>40</b> = 4000K  <b>Ambient Dim™</b> Max 3000K-1900K	<b>CZ14</b> =120-277v, 14W 1100lm <b>CZ20</b> =120-277v, 20W 2265lm <b>AD14</b> =350ma, 14.5W 1000lm  <b>C1</b> =0-10V dimming, 1%, 120-277v <b>C2</b> =TRIAC/ELV 2-wire, 3% 120v (Lead/Trail Edge)	<b>15</b> = 15 Degrees <b>24</b> = 24 Degrees <b>38</b> = 38 Degrees <b>60</b> = 60 Degrees	<b>P14</b> = White <b>BLK</b> =Black <b>P03</b> = Anodized Alum. <b>XXXX</b> = RAL # <b>CST</b> = Custom	<b>CM</b> =Cable Mounted <b>PM</b> = Pendant Mount <b>Pendant Mount Length</b> 12" 24" 36" 48" CST