

Fluorescent surface mounted linear wall washer with nominal 3 1/2" (90mm) wide aperture, and acrylic fresnel spread lens

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum with seamless welded and ground end plates

SOCKET - Semi-specular low iridescence aluminum reflector. G5 socket with rotor for secure lamp retention

MOUNTING - Surface mounted on architectural ceiling

LENS - Acrylic fresnel lens

ELECTRICAL - Integral electronic ballast. Fixture comes with 10' whip of 12 Ga. wire for connection to remote junction box

TRIM - Lens frame integral to housing


LAMP - T5 Fluorescent lamp supplied by others

FINISH - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes

LABELS - UL, C-UL, Damp location

APPLICATIONS

Low profile extrusion used in ceiling heights up to 12 feet (4m) to smoothly wash vertical surfaces such as walls, marker boards, information panels, etc. Suitable for new or existing construction

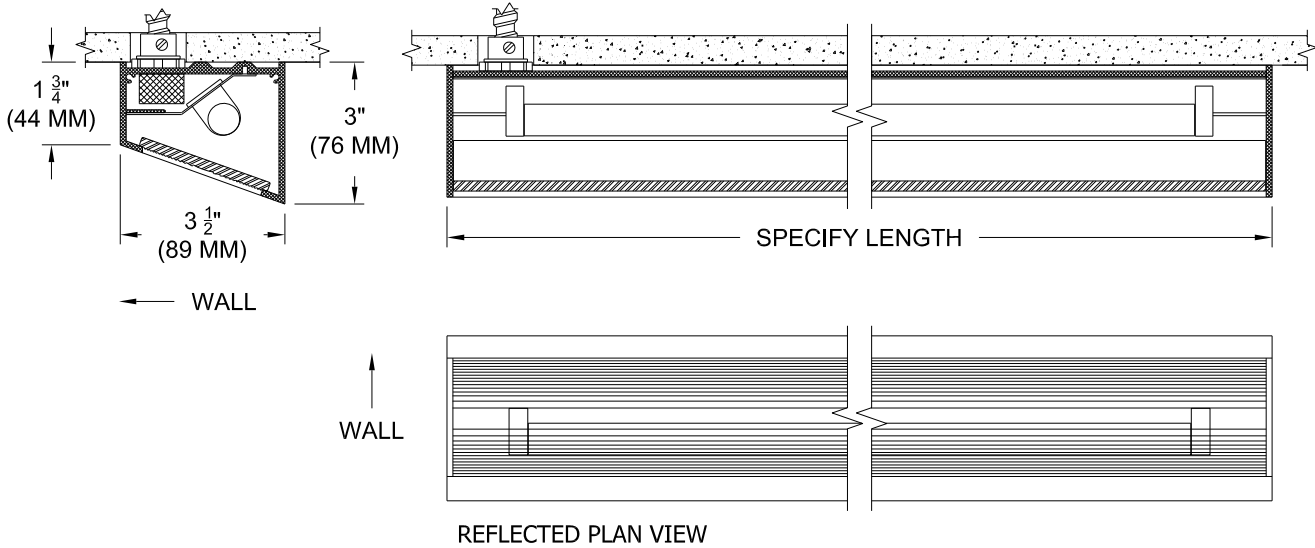

ORDERING INFORMATION

HOUSING	LENGTH	LAMP		TRANSFORMER	FINISH	LENS
600-T5-SH						
Surface Housing	Specify exact length	Qty	Wattage	120	WHT = White BLK = Black PXX = SLI Color XXXX = RAL Color CST = Custom	84A = Fresnel Acrylic 87A = Frosted Fresnel Acrylic
		1	14 24HO	220		
		2	21 39HO	240		
		3	28 54HO	277		
		4	35 80HO			

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 01/12