

Multi-lamp, solid state light engine, recessed linear wall washer. Nominal 5" (125mm) wide aperture, flanged trim and acrylic lens. Small aperture slot used in ceiling heights up to 12 feet (4m) to smoothly wash vertical surfaces such as walls, marker boards, information panels, etc. Suitable for new construction.

## SPECIFICATIONS

### HOUSING

- Extruded aluminum housing with end plates

### MOUNTING

- Recessed in millwork ceiling

### ELECTRICAL

- Integral electronic 0-10v or phase control dimmable driver
- Integral wireway for connection to supply wires

### LAMP

- 9 watt LED 1100lm/ft supplied with fixture
- Available with 80/90 CRI and 2700K thru 4000K

### SOCKET

- Semi-specular low iridescence aluminum reflector
- Inline connectors allow removal and replacement


### LENS

- AVA acrylic diffusing lens as standard. Others available consult factory.




### FINISH

- Powder paint on all surfaces in black and white as standard
- Additional colors and RAL palette available
- Custom finishes available


### LABELS

-  , US tested to UL standards 1598, Damp location

JOB: \_\_\_\_\_  
 SPECIFIER: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_  
 SIGNATURE: \_\_\_\_\_

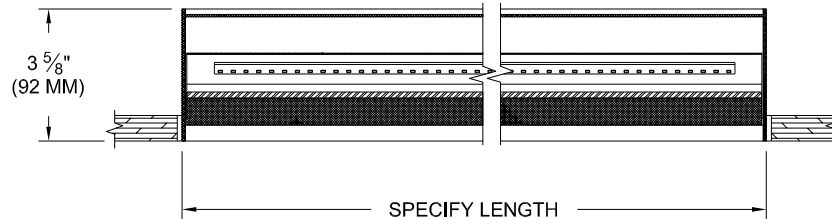

INL - INDIRECT LAMPING OPTION

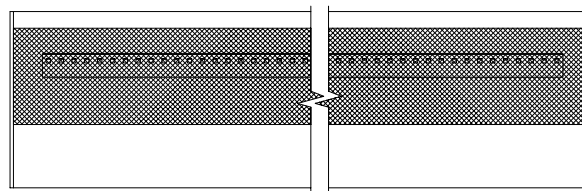

REFLECTED PLAN VIEW

## ORDERING INFORMATION

601-LED-WH	LENGTH	SOURCE / DRIVER*	FINISH	APERTURE LENS	ACCESSORIES
Wood Housing 8=80CRI 27=2700K 9=90+CRI 35=3000K 40=3000K 30=3000K	Specify length in 12" (300mm) increments, 2' (600mm) minimum.	UN2 =120v-277v, 0-10v Dim. 9W/ft 1100lm/ft (nom.) *Add L2, LTB for Lutron 2 wire, Lutron Fade-to-Black L2 = 120v, Lutron Hi-lume 1% 2-wr LED driver 9W/ft 1100lm/ft (nom.) LTB =120-277v, Fade-to-Black Lutron Hi-lume 1% digital EcoSystem driver 12W/ft 700lm/ft (nom.)	WHT = White BLK=Black PXX = SLI Color XXXX = RAL # CST = Custom	74A= AVA Optic 79A= Veiling Acrylic 82A= Frosted Supertex 91A= Solite 92A= Supertex	INL= Indirect Lamping