

Multi-lamp, solid state light engine, surface mounted linear wall washer. Nominal 4" (102mm) wide and 5" (127mm) tall housing with acrylic lens.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum with seamless welded and ground end plates.

SOCKET - Semi-specular low iridescence aluminum reflector. Inline connectors allow removal and replacement.

MOUNTING - Surface mounted on architectural ceiling.

LENS - Acrylic diffusing lens Others available consult factory.

ELECTRICAL - Integral electronic 0-10v or phase control dimmable driver. Integral wireway for connection to supply wires.

TRIM - Lens frame integral to housing.


LAMP - 8 watt LED 1100lm/ft supplied with fixture.

FINISH - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

LABELS - CSA-C,US, Damp Location.

APPLICATIONS

Small rectangular housing used in ceiling heights up to 12 feet (4m) to smoothly wash vertical surfaces such as walls, marker boards, information panels, etc. Suitable for new construction.

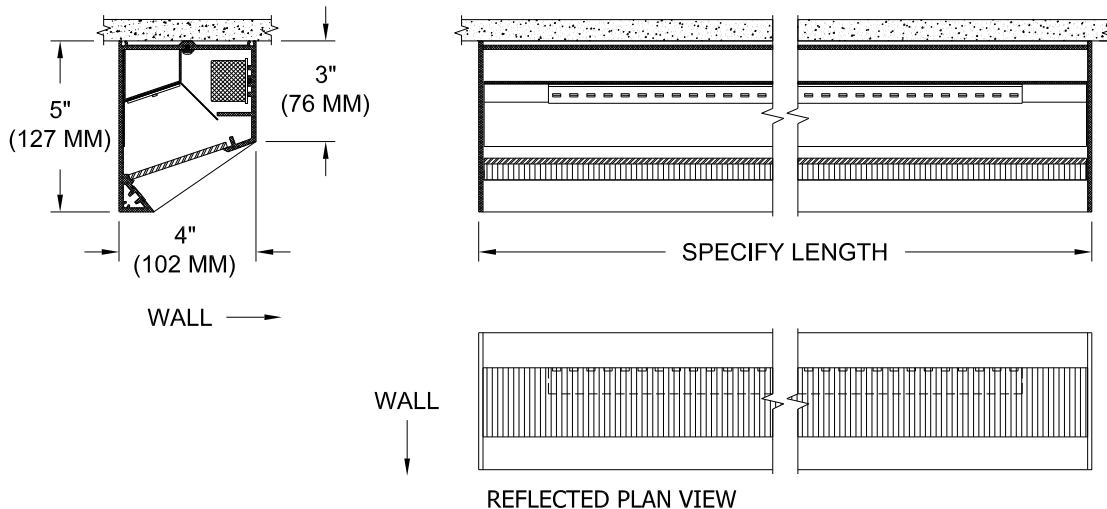

ORDERING INFORMATION

HOUSING	LENGTH	DRIVER	FINISH	APERTURE LENS
606-LEDP__-SH				
Surface Mounted Housing 827 = 2700K 80CRI 830 = 3000K 80CRI	Specify exact length in increments of 12", (300 mm).	UN2 = 120v-277v HO 0-10v 1222W = 120v HO 2 wire	P14 = White BLK = Black PXX = SLI Color XXXX = RAL # CST = Custom	79A = Veiling Acrylic

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.

[CLICK HERE](#) for LED and driver performance information including wattage and lumen output or go to www.specialtylightingindustries.com.



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 1/14