

Fluorescent recessed linear slot wall washer. Nominal 5" (125mm) wide aperture, flangeless trim and acrylic fresnel lens

TYPE: \_\_\_\_\_

JOB: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

**SPECIFICATIONS**

**HOUSING** - Extruded aluminum housing with minimal flange

**SOCKET** - Semi-specular low iridescence aluminum reflector. G5 or G13 socket

**MOUNTING** - Recessed in millwork ceiling

**LENS** - Acrylic fresnel lens

**ELECTRICAL** - Integral electronic ballast, dimming ballast available. Integral wireway for connection to supply wires

**TRIM** - Regress trim integral to housing


**LAMP** - T5 or T8 Fluorescent lamp supplied by others

**FINISH** - Powder paint on all surfaces in black and white as standard. Additional colors and RAL palette available. Consult factory for custom finishes

**LABELS** - UL, C-UL, Damp location

**APPLICATIONS**

Small aperture slot used in ceiling heights up to 12 feet (4m) to smoothly wash vertical surfaces such as walls, marker boards, information panels, etc.

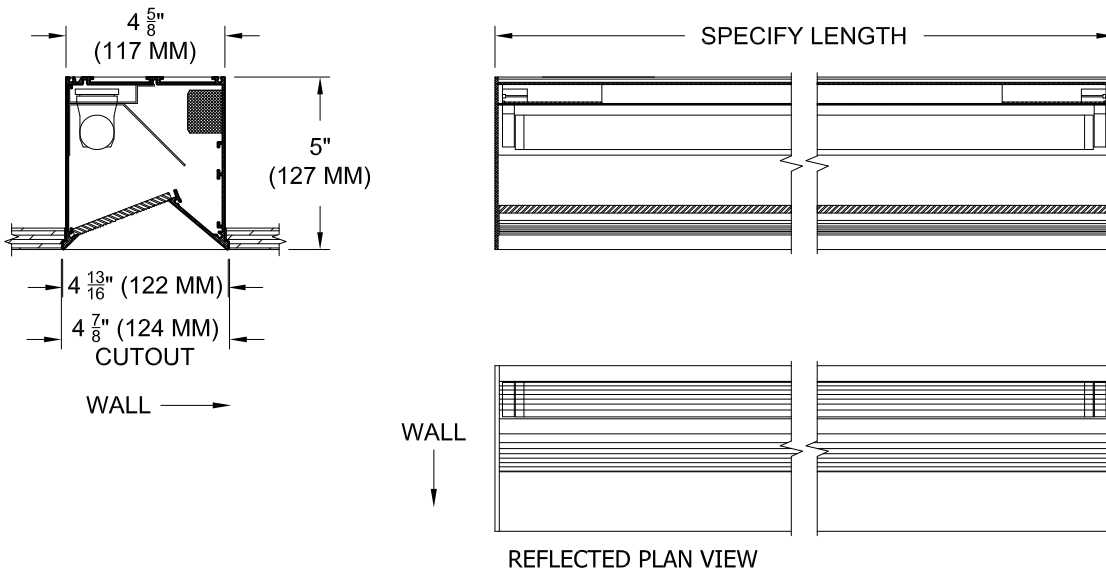

**ORDERING INFORMATION**

HOUSING	LENGTH	LAMP		BALLAST	TRIM FINISH	LENS
<b>607-T8-WH</b>						
Wood Housing	Specify exact length	Qty	Wattage	120 220 240 277 add DM for dimming	WHT = White BLK = Black PXX = SLI Color XXXX = RAL Color CST = Custom	84A = Fresnel Acrylic 87A = Frosted Fresnel Acrylic
		1	17			
		2	25			
		3	32			
		4	40			

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



**SPECIALTY LIGHTING INDUSTRIES, INC.**

NOTE: These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 07/11