TYPE:		
JOB:		

## **SPECIFICATIONS**

**HOUSING** - Heavy gauge extruded aluminum (material of corrosion resistant alloy.) Aluminum end plate.

**REFLECTOR** - Specular, low iridescence, aluminum.

ELECTRICAL - T-10, 120v.

**SOCKET** - T-10, medium base porcelain, 90°C rated, single/twin.

**MOUNTING** - Recessed, use ULTRIM frame for GWB/plaster ceilings.

LABELS - UL, C-UL -Dry Location.


**LAMP** - T-10, 120v, 50w - by others.

LENS - Fresnel, borosilicate glass.

**FINISH** - Powder paint on all surfaces. RAL colors standard, consult factory for custom finishes.

## **APPLICATIONS**

Medium profile, recessed, intended to highlight surface texture in brick, stone, stucco, tile, textured paint, fabric and wood panels.

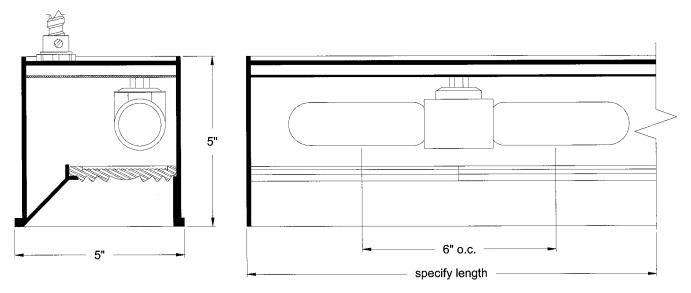

## ORDERING INFORMATION

FIXTURE	LENGTH	FINISH	CEILING
#609 T10			
Recessed linear wall grazing system	specify exact length, increments of 6"	WHT = White BLK = Black XXXX = RAL # CST = Custom (must supply chip)	WD = Wood PL = Plaster



<u>SPECIALTY LIGHTING</u>
INDUSTRIES, INC. ©2004