

Multi-lamp, solid state light engine, linear system, nominal 3" (80mm) wide aperture and acrylic lens.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum with seamless welded and ground end plates.

SOCKET - Circuit board mounted to extruded aluminum heatsink. Inline connectors allow removal and replacement.

MOUNTING - Pendant

LENS - Acrylic diffusing lens Others available consult factory.

ELECTRICAL - Integral dimmable electronic driver with internal short circuit protection. 120v-277v primary, compatible with 0-10v dimmers. Also available for 120v phase control.

TRIM - Regress trim integral to housing.


LAMP - 8 watt LED 1100lm/ft supplied with fixture.

FINISH - Powder paint on all surfaces, white as standard. Additional colors and RAL palette available. Consult factory for custom finishes.

LABELS - CSA-C,US, Damp Location

APPLICATIONS

Narrow profile lighting system used in low to medium ceiling heights to illuminate as general lighting.

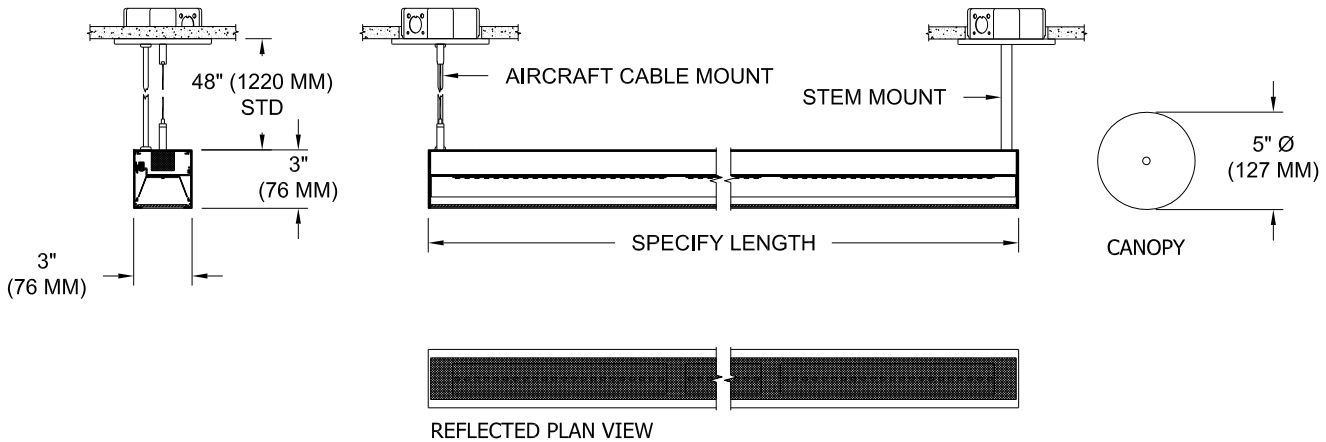

ORDERING INFORMATION

HOUSING	LENGTH	DRIVER	FINISH	LENS	MOUNTING/LENGTH
700-LED-SH					/
Surface Housing 827 = 2700K 80CRI 830 = 3000K 80CRI 835 = 3500K 80CRI	Specify exact length	UN3=120v-277v HE 0-10v UN5=120v-277v HO 0-10v *ADD 2W FOR 2WIRE	WHT= White PXX = SLI Color XXXX = RAL # CST = Custom	79A = Veiling Acrylic	CM = Cable 24" SM = Stem* 36" 48" 48" MAX CST"

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 04/15