# INGROUND NARROW APERTURE LINEAR WALL GRAZING UPLIGHT

Multi-lamp, solid state light engine, recessed linear wall grazing uplight with flangeless housing, nominal 2 1/2" (64mm) wide aperture internal veiling lens and pyrex walkover lens. Narrow profile wall grazing uplight used for low height walls to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric or wood, or specular surfaces such as polished stone or stainless steel.

## **SPECIFICATIONS**

#### HOUSING

· Extruded aluminum housing and lens frame with bolt on end plates

#### **MOUNTING**

· Recessed in floor

## **ELECTRICAL**

· Integral dimmable electronic driver with internal short circuit protection...

#### I AMP

· 2 watt LED supplied with fixture

### SOCKET

- · Circuit board mounted to extruded aluminum heatsink
- · Inline connectors allow removal and replacement

#### LENS

• Pyrex walkover lens for residential or commercial applications. Acrylic diffusing lens

#### IRIM


• Flangeless glass walkover lens held within minimal frame


## **FINISH**

- Housing available in white as standard
- · Additional standard colors, RAL palette, custom finishes available

### **LABELS**

• 💇 , US tested to UL standards 1598, Damp location



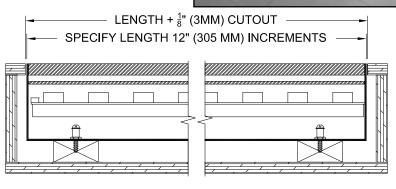


JOB:

TYPE:

SPECIFIER:

**QUANTITY:** 

SIGNATURE:



# **ORDERING INFORMATION**

801-LED-IH	LENGTH	SOURCE / DRIVER	FINISH	APERTURE LENS	WALKOVER LENS
		/			
In-Ground Housing 8 = 80 CRI 27 = 2700K 9 = 90+CRI 30 = 3000K 35 = 3500K	length in increments of 12" (300 mm) Min. 2' required for integral driver	UN2** =120v-277v, 0-10v Dim. 9W/ft 1100lm/ft (nom.) UN3 =120v-277v, 0-10v Dim. 9W/ft 600lm/ft (nom.) UN5 =120v-277v, 0-10v Dim. 12W/ft 700lm/ft (nom.) *Add L2, LTB for Lutron 2 wire, Lutron Fade-to-Black	WHT = White BLK=Black PXX = SLI Color XXXX = RAL # CST = Custom	79A = Veiling Acrylic 91A = Solite	CP84 = Res Clear CP87 = Comm Clear
		L2 = 120v, Lutron Hi-lume 1% 2-wr LED driver 9W/ft 1100lm/ft (nom.) LTB =120-277v, Fade-to-Black Lutron Hi-lume 1% digital EcoSystem driver 12W/ft 700lm/ft (nom.)			



\*\*UN2 for use with 90+CRI

Patent Pending. These specifications subject to change without notice.