

Multi-lamp, solid state light engine, recessed linear wall grazer with flangless housing, nominal 2" (51mm) wide aperture and acrylic lens. May be used as a wall grazer (3U) or a general down light (4U). Used in low ceiling heights to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric or wood, or specular surfaces such as polished stone or stainless steel.

**JOB:** \_\_\_\_\_  
**SPECIFIER:** \_\_\_\_\_  
**TYPE:** \_\_\_\_\_  
**QUANTITY:** \_\_\_\_\_  
**SIGNATURE:** \_\_\_\_\_

## SPECIFICATIONS

### HOUSING

- Extruded aluminum with ultrim plaster frame
- ≈ Airtight construction suitable for direct contact with insulation

### MOUNTING

- Recessed in sheetrock ceiling

### ELECTRICAL

- Integral dimmable electronic driver with internal short circuit protection.
- 120v-277v primary, compatible with 0-10v dimmers.
- Also available for 120v phase control. Consult factory for other drivers.

### LAMP

- 2 watt LED 2" o.c. supplied with fixture

### SOCKET

- Circuit board mounted to extruded aluminum heatsink
- Inline connectors allow removal and replacement

### LENS

- Acrylic diffusing lens. Others available consult factory


### TRIM



- Lens frame integral to housing

### FINISH

- Housing available in white as standard
- Additional standard colors, RAL palette, custom finishes available

### LABELS

-  , US tested to UL standards 1598, Damp location, Wet with ST trim, IC/Airtight

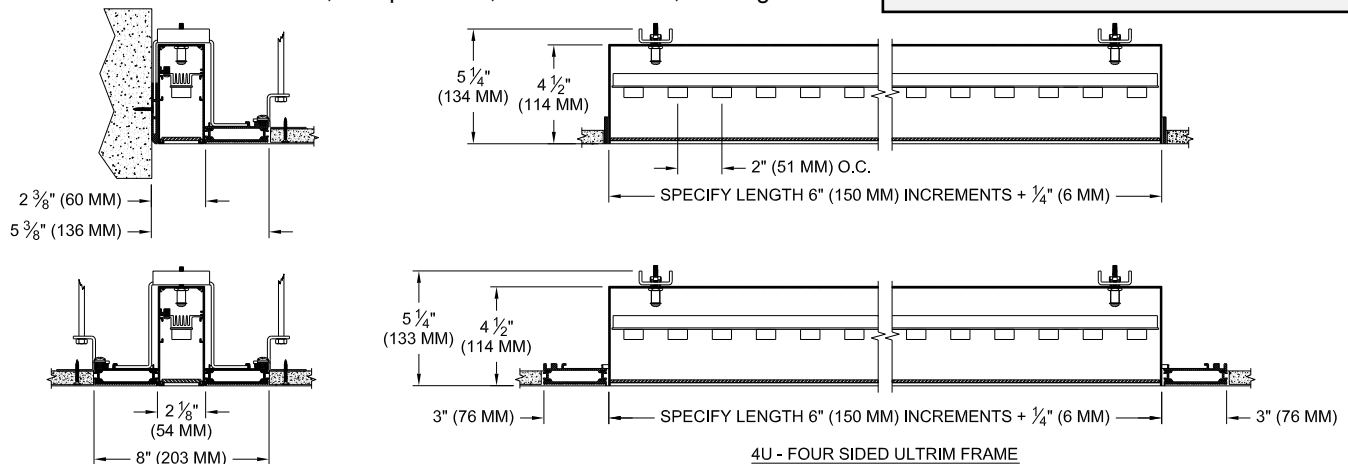

REFLECTED PLAN VIEW

## ORDERING INFORMATION

801-LEDP-APH	LENGTH	DRIVER	FINISH	APERTURE LENS	ACCESSORIES
Airtight Plaster Housing <b>827</b> = 2700K 80CRI <b>830</b> = 3000K 80CRI <b>835</b> = 3500K 80CRI	Specify exact length in increments of 12" (300 mm) Min. 2' required for integral driver	<b>UN3</b> = 120v-277v HE 0-10v Dim. <b>UN5</b> = 120v-277v HO 0-10v Dim. <b>123LT2</b> = 120v HE Lutron 2 wire <b>125LT2</b> = 120v HO Lutron 2 wire <b>123LT3</b> = 120-277v Lutron 3 wire <b>125LT3</b> = 120-277v Lutron 3 wire	<b>P14</b> = White <b>BLK</b> = Black <b>PXX</b> = SLI Color <b>XXXX</b> = RAL # <b>CST</b> = Custom	<b>79A</b> = Veiling Acrylic <b>91A</b> = Solite	<b>ST</b> = Shower Trim <b>LC</b> = Lens Clip <b>3U</b> = 3 Side Ultrim <b>4U</b> = 4 Side Ultrim



Patent Pending.  
 These specifications subject to change without notice.

[www.specialtylightingindustries.com](http://www.specialtylightingindustries.com)  
 1306 Doris Avenue, Ocean, NJ 07712 USA  
 800.462.7812 732.517.0800 FAX: 732.517.0971