

Multilamp halogen low voltage surface mounted linear wall grazer with nominal 3" (75mm) wide aperture and borosilicate supertex spread lens. Wall grazer used to highlight the texture in surfaces such as stucco or brick or illuminate flat surfaces such as stone or metal. May also be used for continuous linear downlighting.

JOB: _____
SPECIFIER: _____
TYPE: _____
QUANTITY: _____
SIGNATURE: _____

SPECIFICATIONS

HOUSING

- Extruded aluminum with seamless welded and ground end plates

MOUNTING

- Surface mounted

ELECTRICAL

- Fixture comes with wiring access plate with knockouts for connection to remote transformer
- Transformer should be sized for the run length and ordered separately

LAMP

- ALR-12, 20w max. supplied by others (4" o.c. only)
- MR-16, 37w max. supplied by others

SOCKET

- Precision die formed aluminum socket plate
- G4/G6 ceramic socket or nickel plated steel double contact bayonet base with stainless steel spring for optimum contact
- High temperature lead wires


LENS


- Supertex borosilicate glass. Others available consult factory

FINISH

- Powder paint on all surfaces in black and white as standard
- Additional colors and RAL palette available
- Custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location, Wet with ST trim

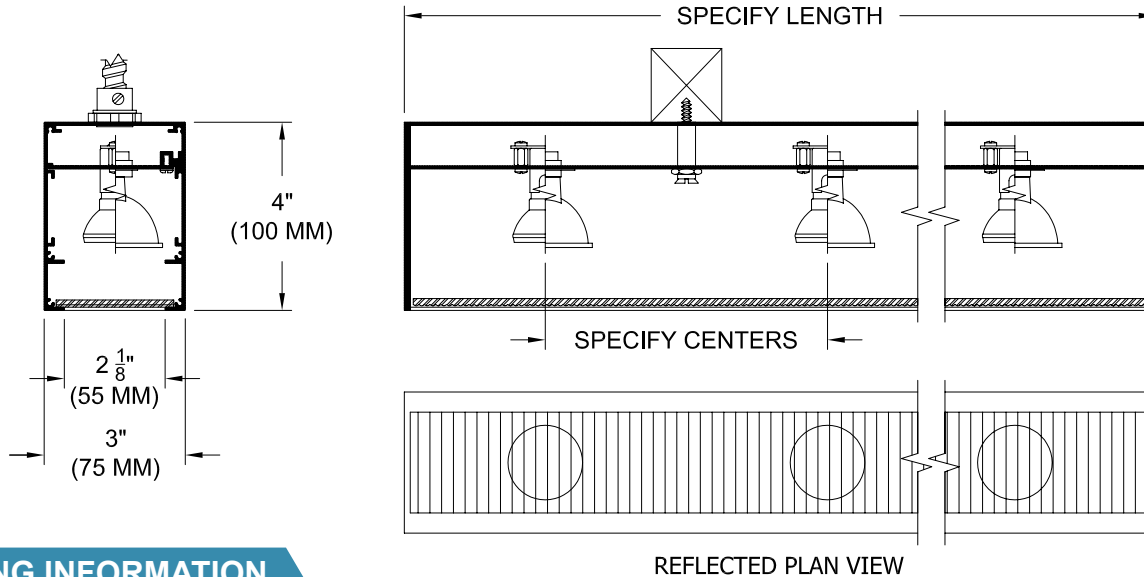

ORDERING INFORMATION

802-__-SH	LAMP SPACING	LENGTH	TRANSFORMER	FINISH	APERTURE LENS	ACCESSORIES
			RX			
Surface Mounted Housing MR = MR16 Lamp ALR = ALR12 Lamp	4 = 4" (20w max) 6 = 6" or custom spacing	Specify exact length	RX = Remote- 12v	WHT = White BLK=Black PXX = SLI Color XXXX = RAL # CST = Custom	82A = Frosted Supertex 91A = Solite 92A = Supertex 93A = Sandblasted 95A = Full Prismatic	LC = Lens Clip ST = Shower Trim



Patent Pending.
 These specifications subject to change without notice.

www.specialtylightingindustries.com
 1306 Doris Avenue, Ocean, NJ 07712 USA
 800.462.7812 732.517.0800 FAX:732.517.0971