

Multi-lamp, low-voltage halogen, recessed linear wall grazer with nominal 3" wide aperture, borosilicate supertex spread lens in gasketed frame with captive fasteners. Suitable for wet location.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum housing with integral flange.

SOCKET - Precision die formed aluminum socket plate. G4/G6 ceramic socket with high temperature, teflon coated lead wires.

MOUNTING - Recessed in sheetrock or stone ceiling.

LENS - Supertex borosilicate glass. Others available consult factory.

ELECTRICAL - Fixture comes with 10' whip of 10 Ga. wire for connection to remote transformer. Transformer should be sized for the run length and ordered separately.

TRIM - Flanged aluminum fully gasketed frame with captive fasteners and 3" aperture.


LAMP - MR-16, 37w max. supplied by others.

FINISH - Black anodized housing. Powder paint trim frame available in black white or RAL colors as standard. Consult factory for custom finishes.

LABELS - UL, C-UL, Wet location

APPLICATIONS

Small aperture wall grazer used in showers or other wet locations to highlight the texture in surfaces such as stucco or brick or illuminate flat surfaces such as stone or metal. May also be used for continuous linear downlighting.

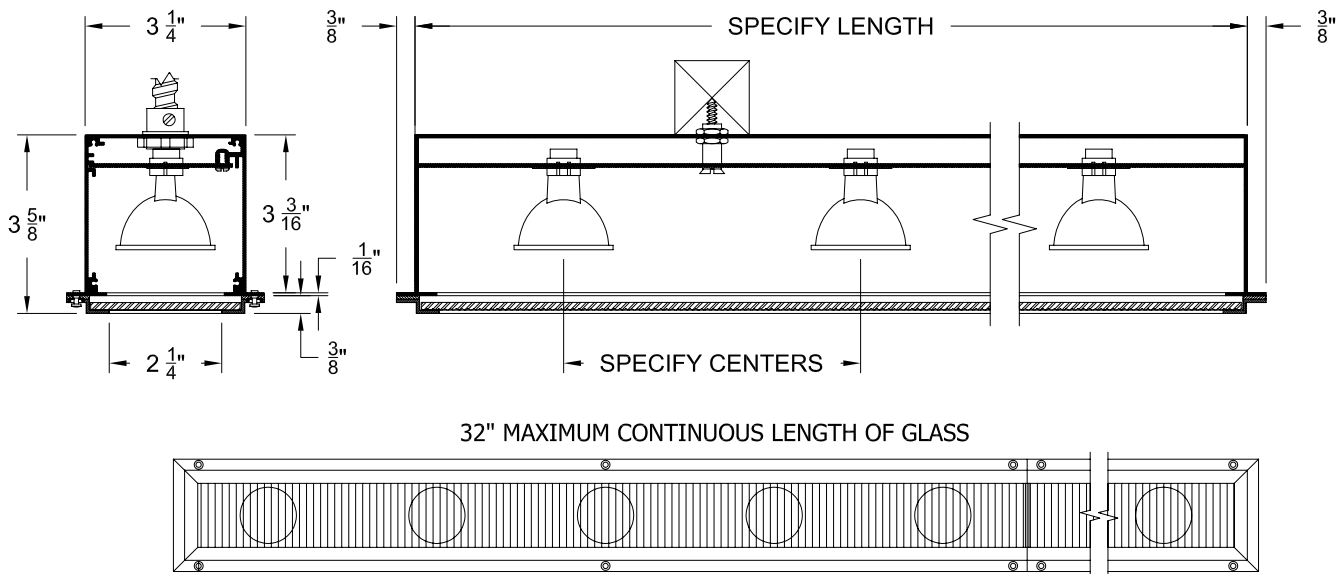

ORDERING INFORMATION

HOUSING	LAMP SPACING	LENGTH	FINISH	APERTURE LENS
802SL-___-FH-FT-RX				
Flanged housing 20MR-16 = 12v, 20w 37MR-16 = 12v, 37w (maximum 74w/ft)	4 = 4" 6 = 6" or custom spacing	Specify exact length	WHT = White BLK = Black XXXX = RAL # CST = Custom (supply chip)	91A = Solite 92A = Supertex 93A = Sandblasted 95A = Full Prismatic

This information is provided as a specification aid. A submittal will be prepared by the manufacturer for approval prior to fabricating this product.



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 2006