

Single lamp, low-voltage halogen, recessed linear wall grazing upright with flanged housing, nominal 4" square aperture, borosilicate supertex spread lens and rolled pyrex walkover lens.

TYPE: _____

JOB: _____

SPECIFIER: _____

SPECIFICATIONS

HOUSING - Extruded aluminum housing with integral flange.

SOCKET - Precision die formed aluminum socket plate. G4/G6 ceramic socket with high temperature, teflon coated lead wires.

MOUNTING - Recessed in floor.

ELECTRICAL - For use with remote transformer. Transformer should be sized for the run length and ordered separately.

LENS - 3/8" clear pyrex walkover lens and Supertex borosilicate glass spreadlens. Others available consult factory
TRIM - Flangeless glass walkover lens held within minimal frame.


LAMP - MR-16, 37w max. supplied by others.

FINISH - Black anodized housing. Consult factory for custom finishes.

LABELS - UL, C-UL

APPLICATIONS

Small aperture wall grazing upright used in wood, stone or concrete floors to highlight the texture in surfaces such as brick, illuminate flat surfaces such as venetian plaster or wood, or light specular surfaces such as polished stone or stainless steel.

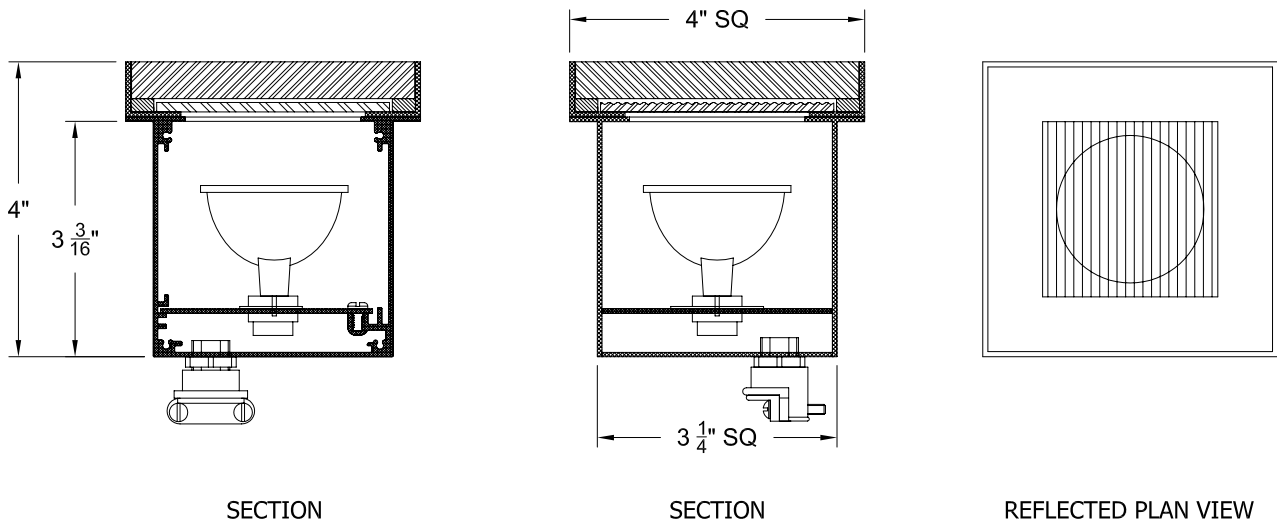

ORDERING INFORMATION

HOUSING	TRANSFORMER	HOUSING FINISH	APERTURE LENS	TOP LENS
802UPC-1MR16-FH	RX			
Flanged housing	RX = Remote	BLK = Black CST = Custom (Consult Factory)	91A = Solite 92A = Supertex 93A = Sandblasted 95A = Full Prismatic	CP = Clear SP = Sandblasted



SPECIALTY LIGHTING INDUSTRIES, INC.

NOTE: These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 DORIS AVENUE, OCEAN, NJ 07712 USA 800.462.7812 732.517.0800 FAX 732.517.0971 © 2006