

Multi-lamp, low-voltage halogen, recessed linear light slot with flanged housing, nominal 2.5" (64mm) wide aperture and borosilicate aperture lens. May be used as a wall grazer or a general down light. Narrow profile down light or wall grazer to highlight textured surfaces such as stucco or brick or illuminate flat surfaces such as stone or metal. LC used in high vibration applications such as elevator cabs

JOB: _____
SPECIFIER: _____
TYPE: _____
QUANTITY: _____
SIGNATURE: _____

SPECIFICATIONS

HOUSING

- Extruded aluminum housing with integral flange

MOUNTING

- Recessed in architectural ceiling

ELECTRICAL

- Fixture comes with terminal block for connection to power supply
- Remote transformer should be sized for the run length and ordered separately

LAMP

- ALR-12 (GBD), MR-11 (FSS) narrow spot 20w max supplied by others

SOCKET

- Precision die formed aluminum socket plate
- G4/G6 ceramic socket or nickel plated steel double contact bayonet base with stainless steel spring for optimum contact. High temperature lead wires

LENS

- Supertex borosilicate glass. Others available consult factory


TRIM



- Integral flange

FINISH

- Powder paint on all surfaces in black and white as standard
- Additional colors and RAL palette available / Custom finishes available

LABELS

-  , US tested to UL standards 1598, Damp location, Wet with ST trim

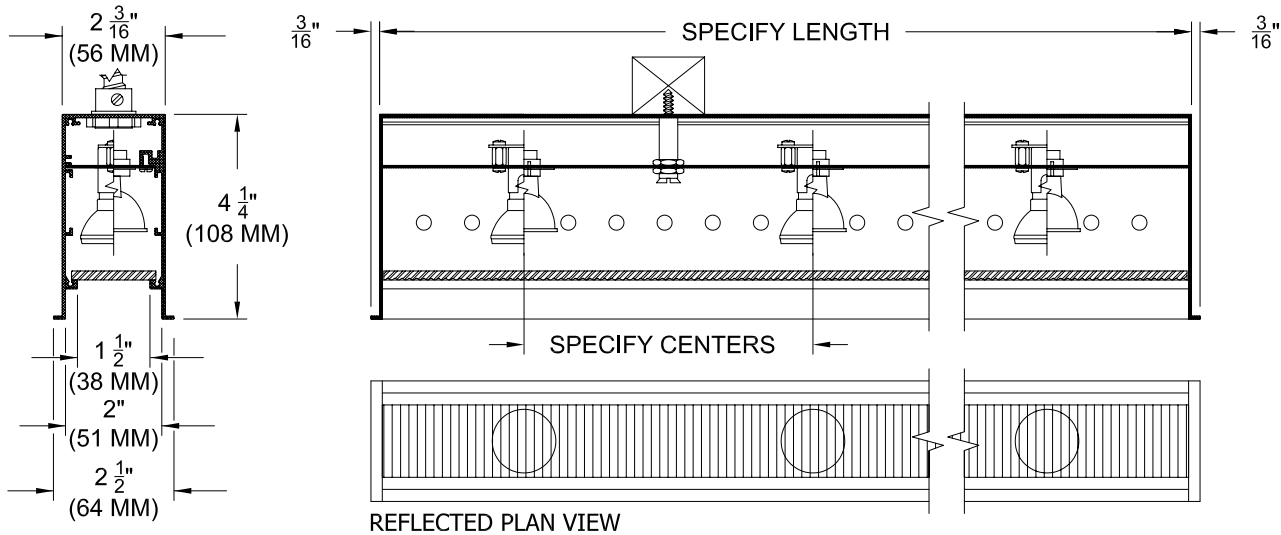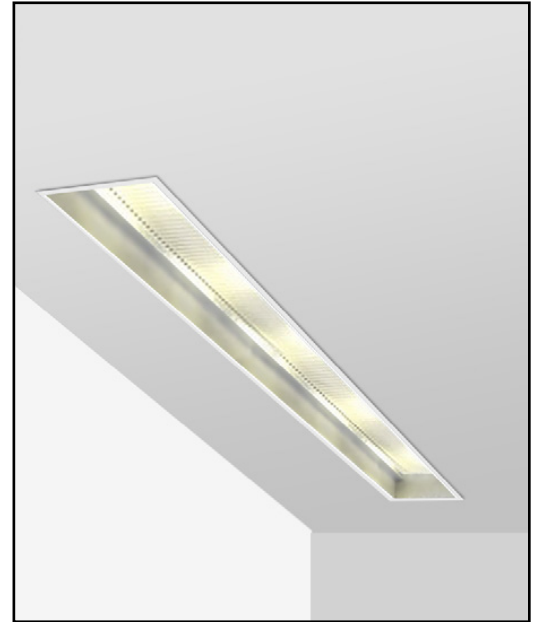

ORDERING INFORMATION

805-ALRMR-FH	LAMP SPACING	LENGTH	TRANSFORMER	FINISH	APERTURE LENS	ACCESSORIES
			RX			
Flanged Housing MR = MR11 Lamp ALR = ALR12 Lamp	4 = 4" 6 = 6" or custom spacing	Specify exact length in increments of 12", (300mm)	RX = Remote	P14 = White BLK=Black PXX = SLI Color XXXX = RAL # CST = Custom	82A = Frosted Supertex 91A = Solite 92A = Supertex 93A = Sandblasted 95A = Full Prismatic	LC = Lens Clip ST = Shower Trim



Patent Pending.
 These specifications subject to change without notice.

www.specialtylightingindustries.com
 1306 Doris Avenue, Ocean, NJ 07712 USA
 800.462.7812 732.517.0800 FAX:732.517.0971