RECESSED LINEAR NARROW REGRESSED LENS WALL GRAZING SYSTEM

Multi-lamp, solid state light engine, recessed linear wall grazer with flangled housing, nominal 2" (51mm) wide aperture and regressed acrylic lens. Narrow profile wall grazer used in low ceiling heights to highlight the texture in surfaces such as stucco or brick, illuminate flat surfaces such as venetian plaster, fabric or wood, or specular surfaces such as polished stone or stainless steel.

SPECIFICATIONS

HOUSING

Extruded aluminum housing with integral flange

MOUNTING

· Recessed in architectural ceiling

ELECTRICAL

- · Integral dimmable electronic driver with internal short circuit protection
- 120v-277v primary, compatible with 0-10v dimmers
- Also available for 120v phase control

LAMP

· 2 watt LED 2"(50mm) o.c. supplied with fixture

SOCKET

- · Circuit board mounted to extruded aluminum heatsink
- · Inline connectors allow removal and replacement

LENS

· Acrylic diffusing lens. Others available consult factory

TRIM


Overlap flange integral to housing

FINISH

- · Powder paint on all surfaces in black and white as standard
- Additional colors and RAL palette available
- Custom finishes available

LABELS

US tested to UL standards 1598, Damp location, Wet with ST trim

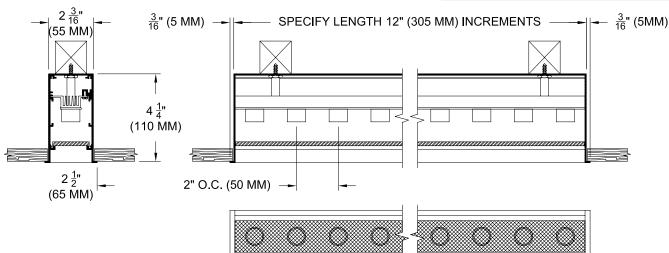

ORDERING INFORMATION

REFLECTED PLAN VIEW

805-LEDP-FH	LENGTH	DRIVER	FINISH	APERTURE LENS	ACCESSORIES
Flanged Housing 827 = 2700K 80CRI 830 = 3000K 80CRI 835 = 3500K 80CRI	Specify exact length in increments of 12" (300 mm) Min. 2' required for integral driver	UN3 = 120v-277v HE 0-10v Dim. UN5 = 120v-277v HO 0-10v Dim. 123LT2 = 120v HE Lutron 2 wire 125LT2 = 120v HO Lutron 2 wire 123LT3 = 120-277v Lutron 3 wire 125LT3 = 120-277v Lutron 3 wire		79A = Veiling Acrylic 91A = Solite	ST = Shower Trim LC = Lens Clip



Patent Pending. These specifications subject to change without notice.

www.specialtylightingindustries.com

1306 Doris Avenue, Ocean, NJ 07712 USA 800.462.7812 732.517.0800 FAX:732.517.0971 12/16

ОВ:
PECIFIER:
YPE:
QUANTITY:
IGNATURE:



805-LEDP-FH